

ASGARD FREESTANDING ADJUSTABLE TWO BIKE RACK




COMPATIBILITY

This bike stand is designed to accommodate standard bicycle wheels ranging in size from 26 inches to 29 inches.

TOOLS REQUIRED

Screwdriver, Posi-Drive Screwdriver, 8mm Spanner, 4mm Allen Key

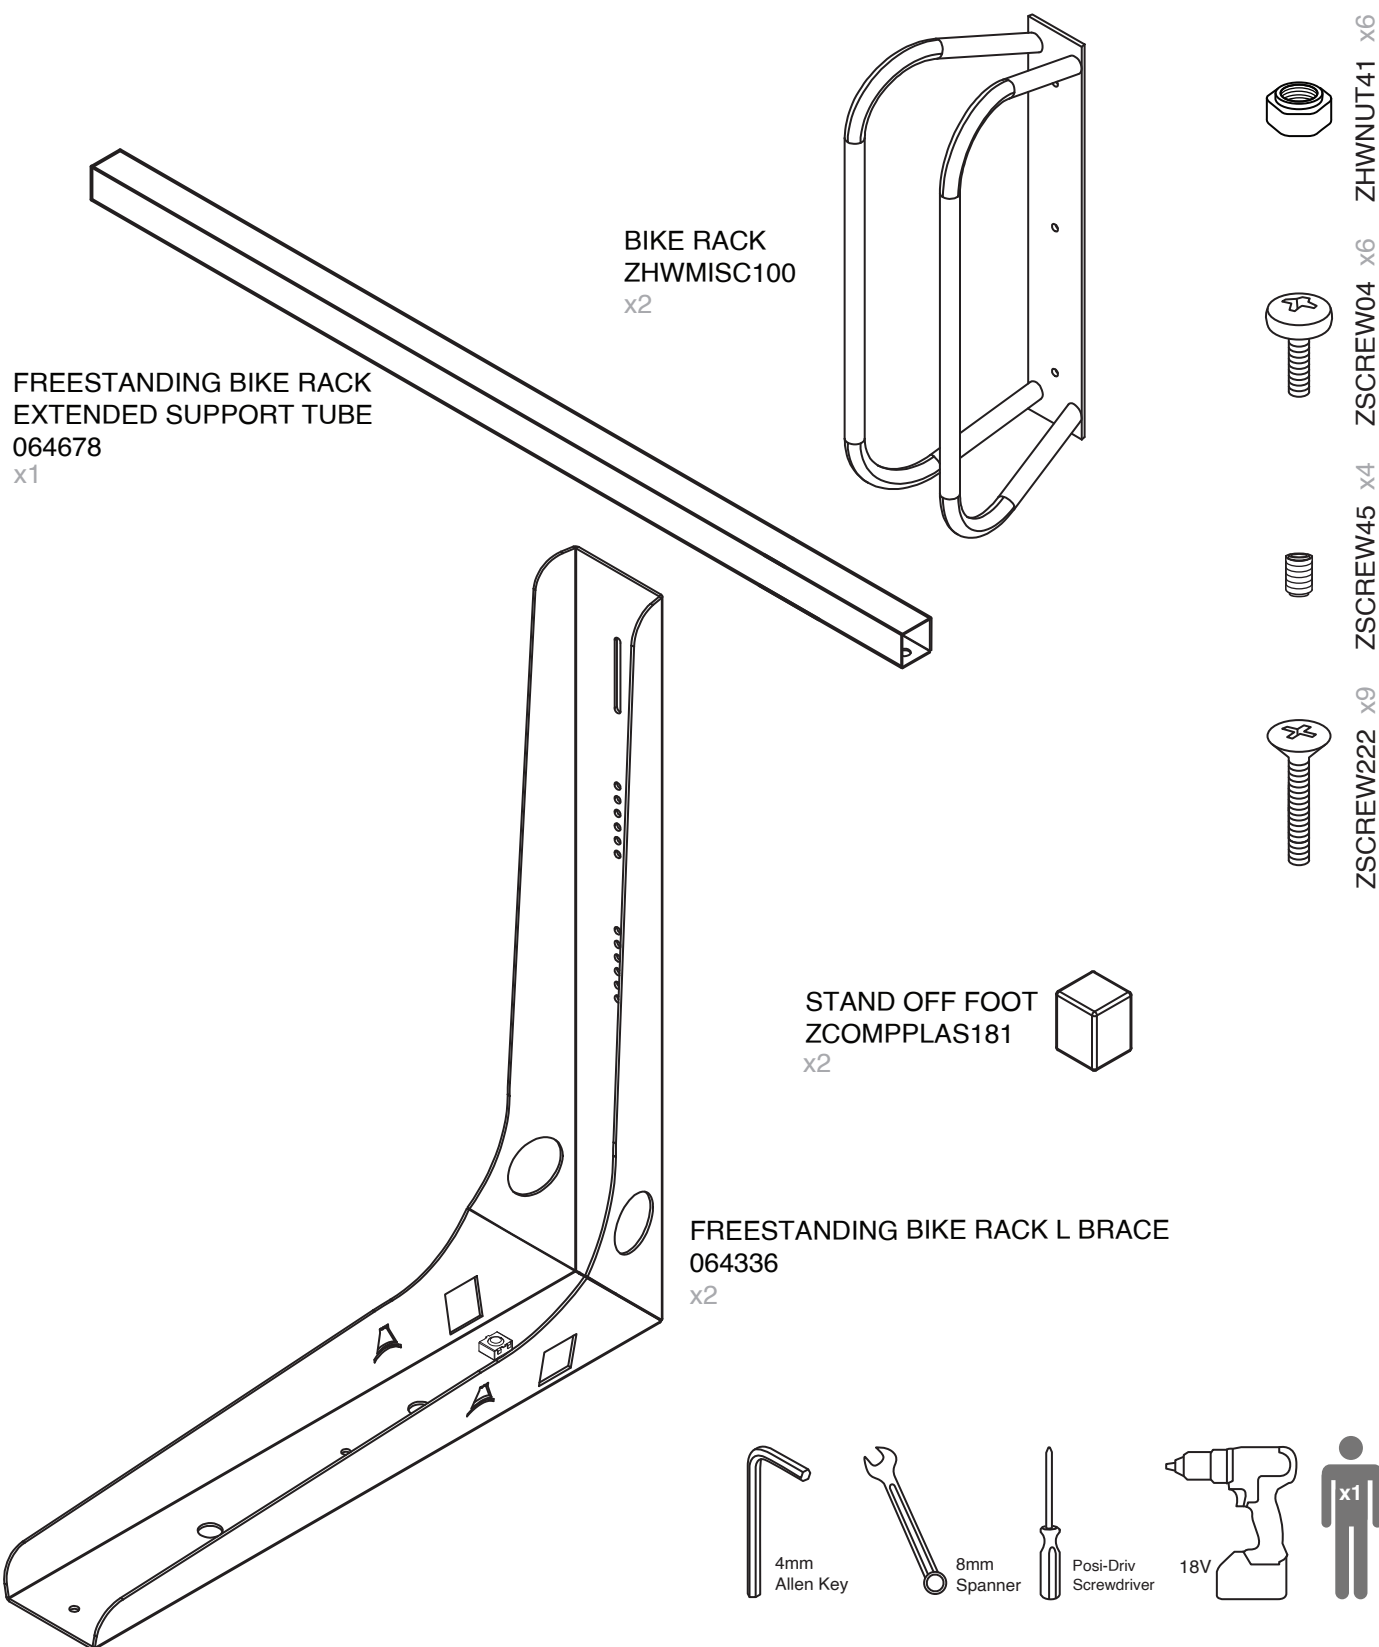


For maintenance instructions of this product visit www.asgardsss.co.uk

1! SECURE THE TWO BIKE RACKS TO THE TWO 'L' BRACES USING THREE SCREWS AND THREE NUTS.




x6

x6

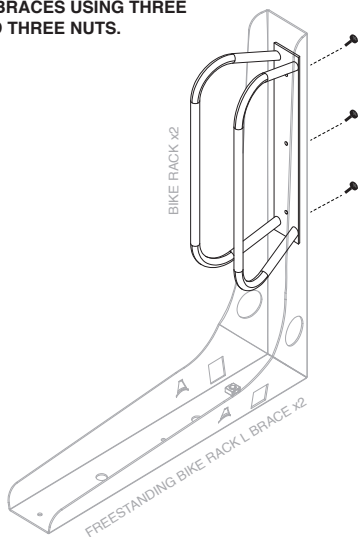


2! PUSH ONE FOOT ONTO THE EXTENDED SUPPORT TUBE (064470) BY HAND.

STAND OFF FOOT x1

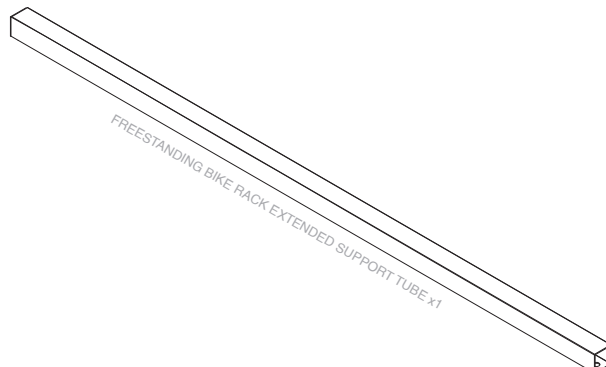


3! SLIDE ONE SUPPORT TUBE THROUGH THE 'L' BRACE.

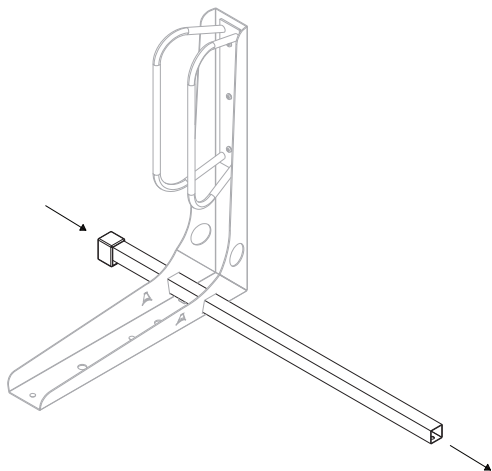


4! TURN THE ASSEMBLED STAND UPSIDE DOWN AND ALIGN THE HOLES ON THE SUPPORT TUBE AND 'L' BRACE. SECURE WITH TWO ZSCREWS45.



x2

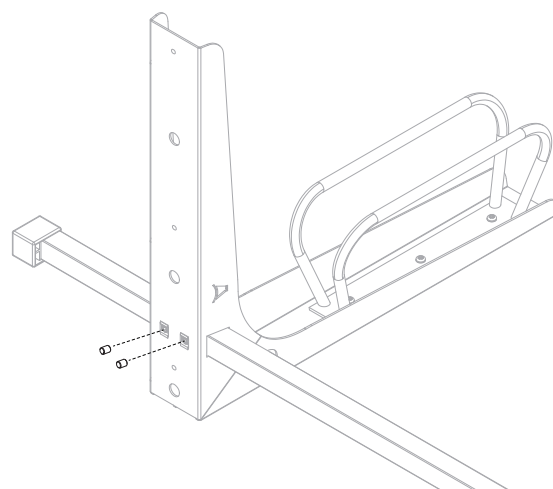

5! REPEAT STEPS THREE AND FOUR FOR THE SECOND 'L' BRACE. PUSH THE SECOND FOOT ONTO THE SUPPORT TUBE.

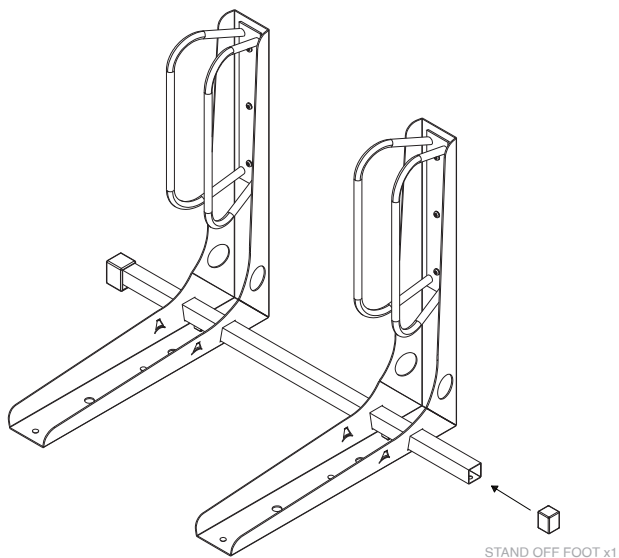

6! OPTIONAL: FASTEN TO FLOOR USING NINE ZSCREWS222.



x6

