GLADIATOR PLUS 2

BASE INSTRUCTIONS
Flat and firm base. Recommended: concrete, tarmac or paving flags.
Min. distance from walls/ shrubbery: 1000mm.
Min. base size (WxDxH) 2410mm x 4940mm x 50mm.

LEVELING THE UNIT
Correctly level the constructed unit using the shims (ZCOMPPLAS) provided prior to fixing the unit to the ground. Slide the packing pieces under the corners of the unit base as required until an equal gap has been achieved around the door allowing for its smooth operation and alignment.

It is always recommended to anchor down the unit to the ground. Drill through the four holes in each of the base of the unit using 6mm dia masonry drill to a depth of 70mm. Screw in the anchor fixings. (These have a self cutting thread). If not anchoring the unit, fit the self seal plugs BEFORE BUILDING to block the fixing holes from underneath. **Please note, product must be bolted down to comply with LPS1175**

TOOLS REQUIRED
Power driver POSI-DRIV screwdriver, 6mm dia. masonry drill and a 10mm socket or spanner.

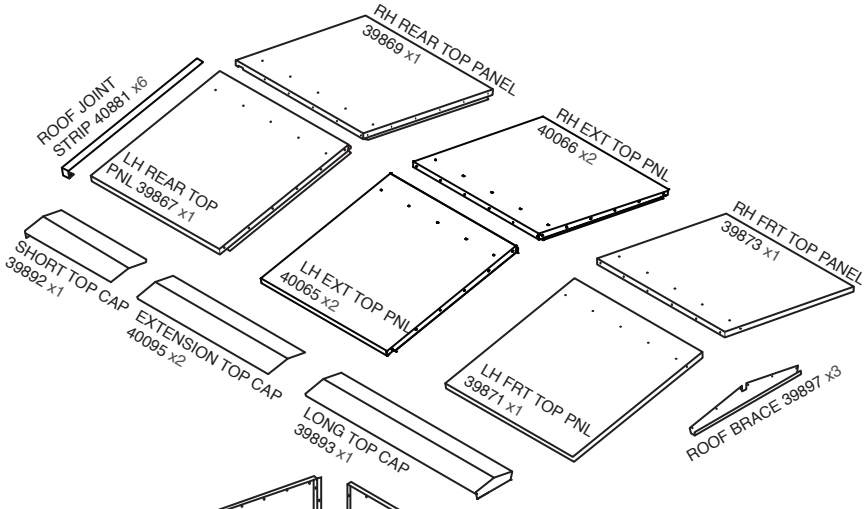

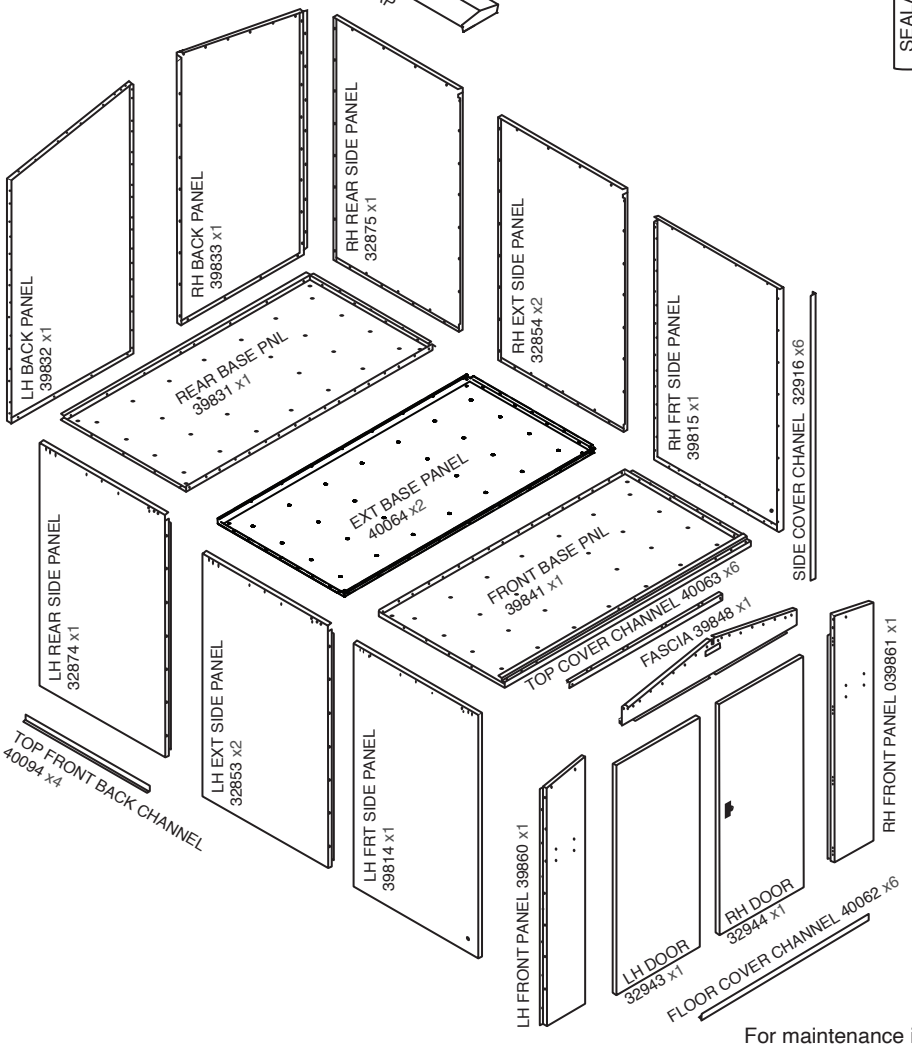

Warning: some panels may weigh over 20Kg. Beware of manual handling

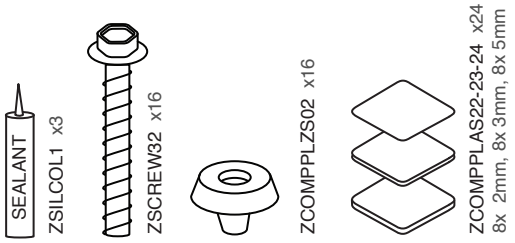

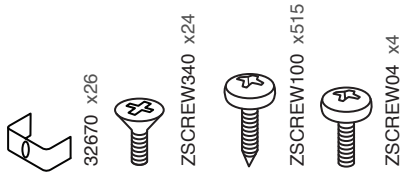



Warning: Please keep this key card safe! Refer to if replacement key is required.

Posi-Driv Screwdriver

6mm Dia.

10 mm Spanner



For maintenance instructions of this product visit www.asgardsss.co.uk

PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

1

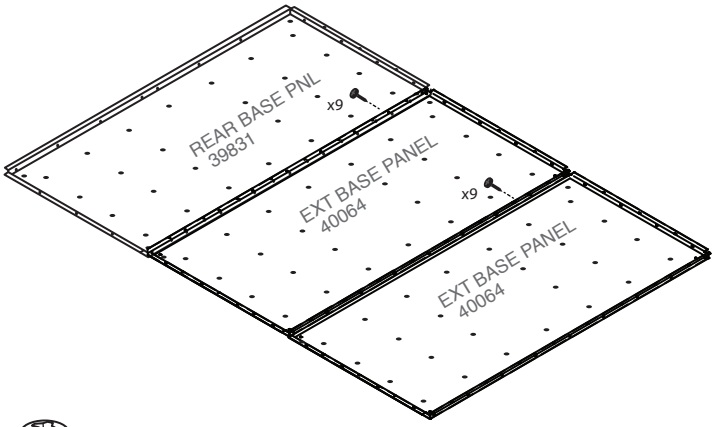

x18

2!

IF YOU HAVE AN OPTIONAL RAMP, PLACE UNDERNEATH FRONT BASE PANEL AT THIS STAGE

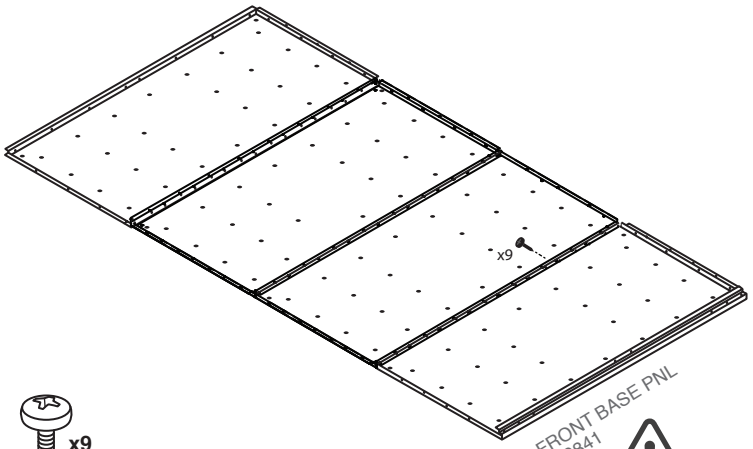

x9

3

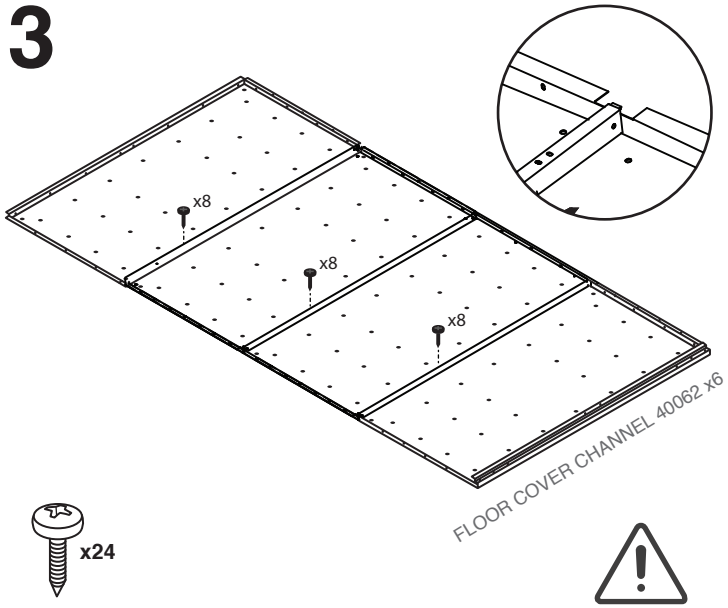

x24

4

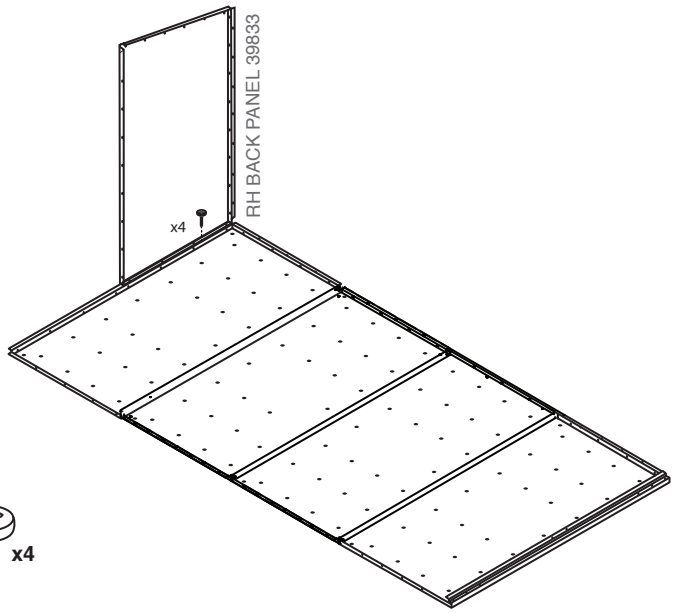

x4

5

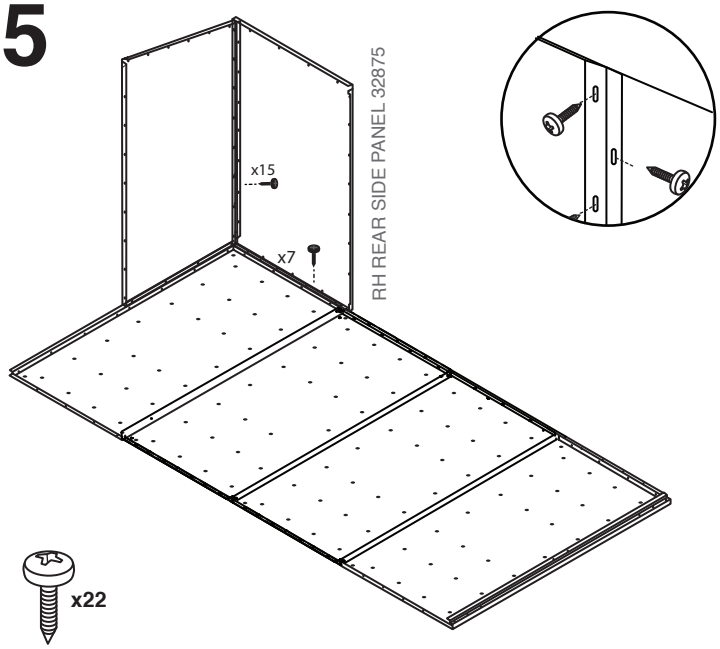

x22

6

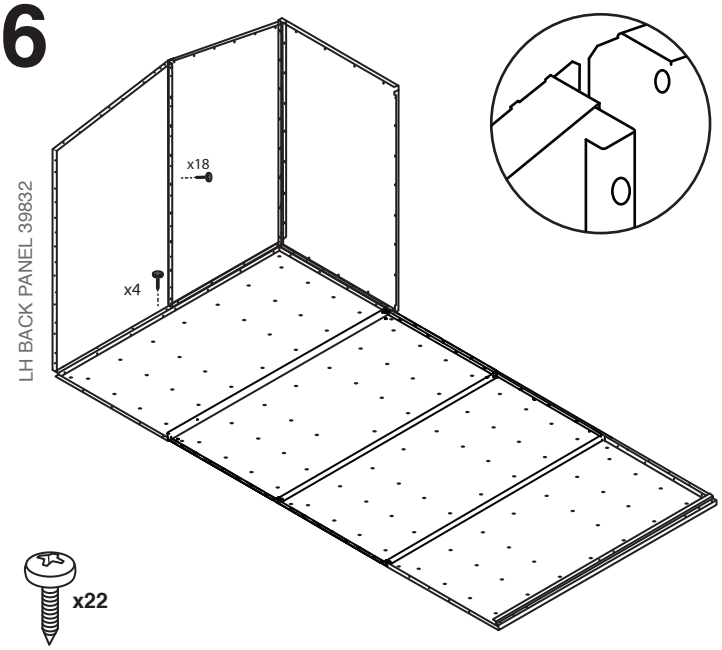

x22

PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

7

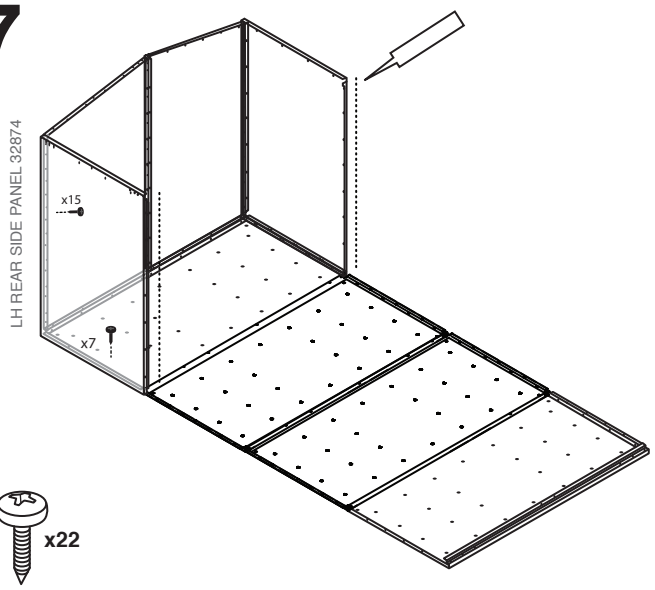

x22

8

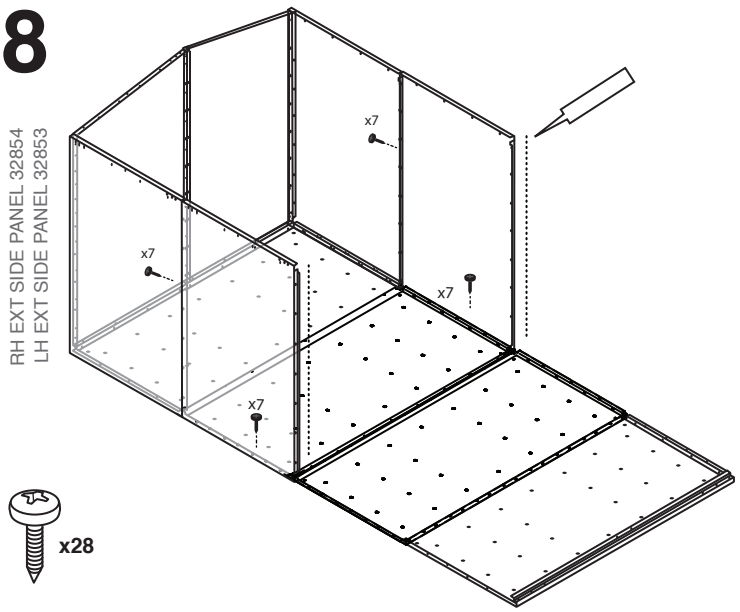

x28

9

REPEAT STEP 8

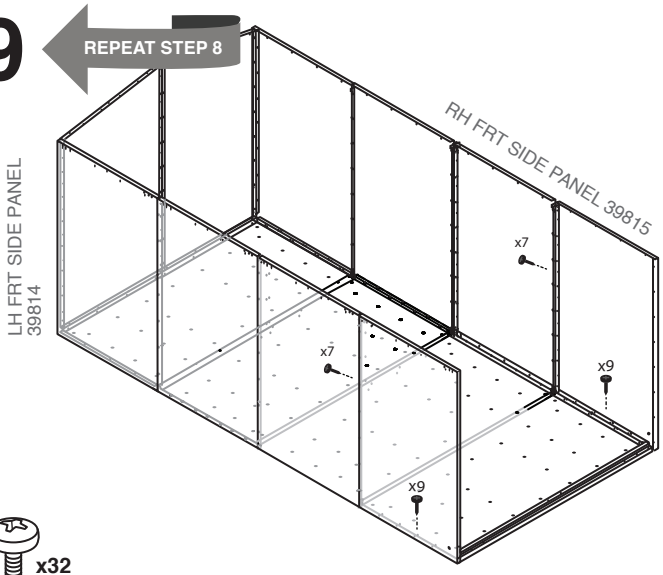

x32

10

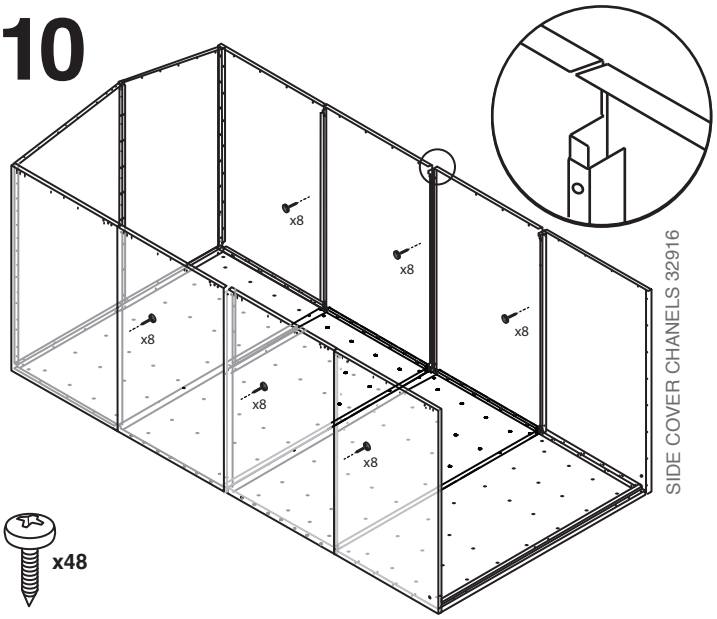

x48

11

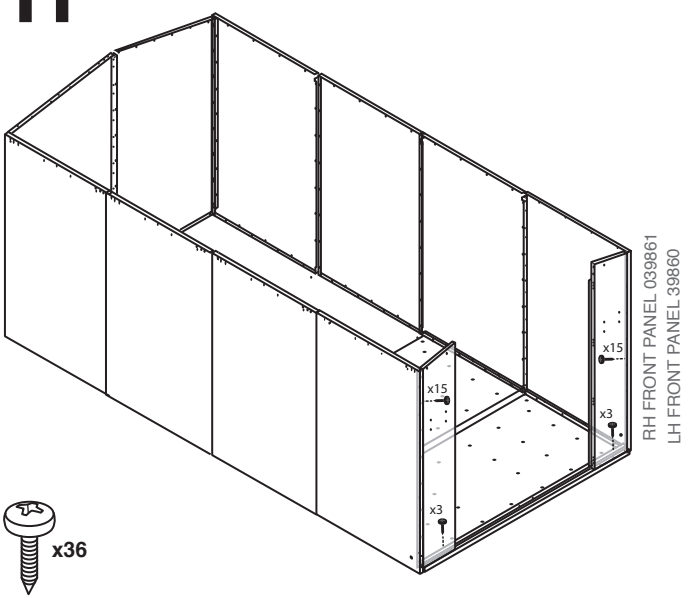

x36

12

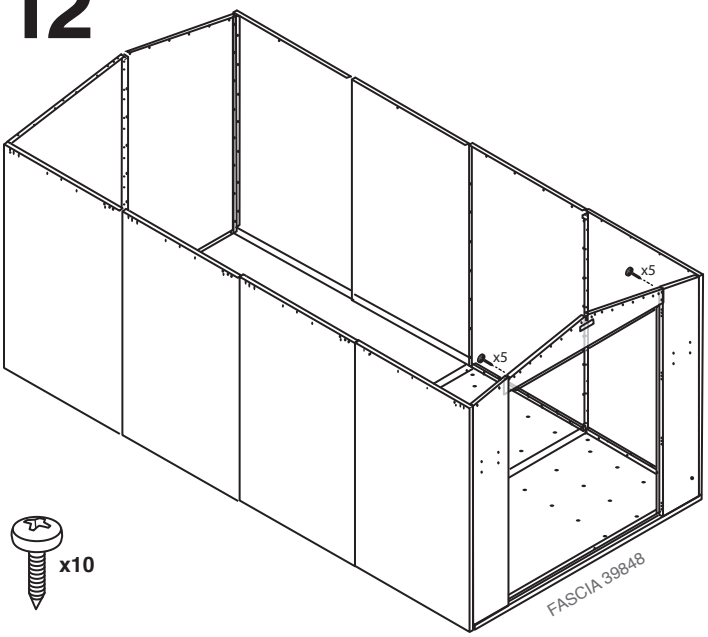

x10

PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

13

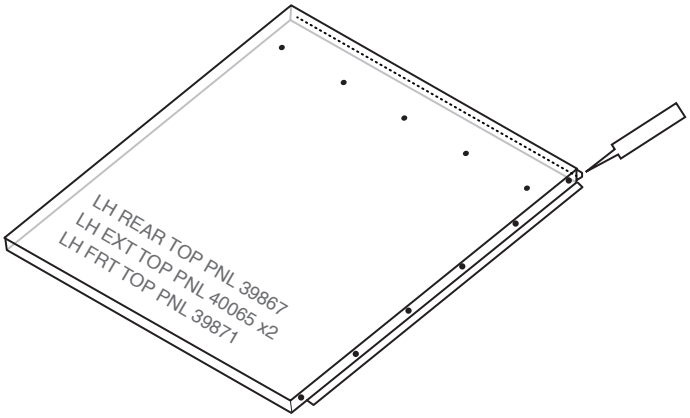

14

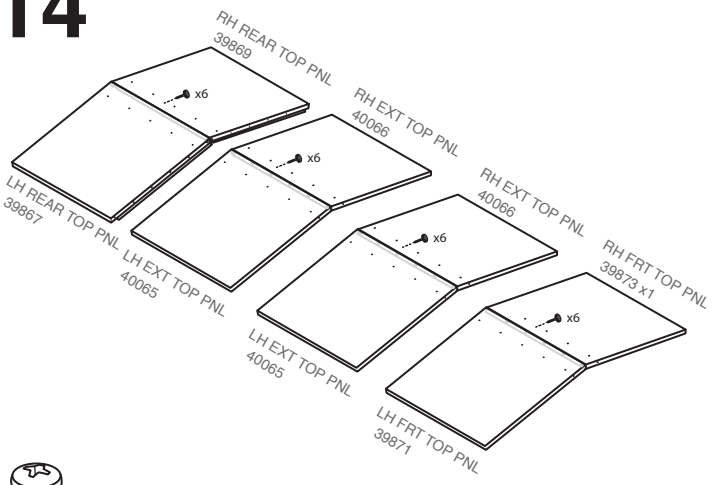

15

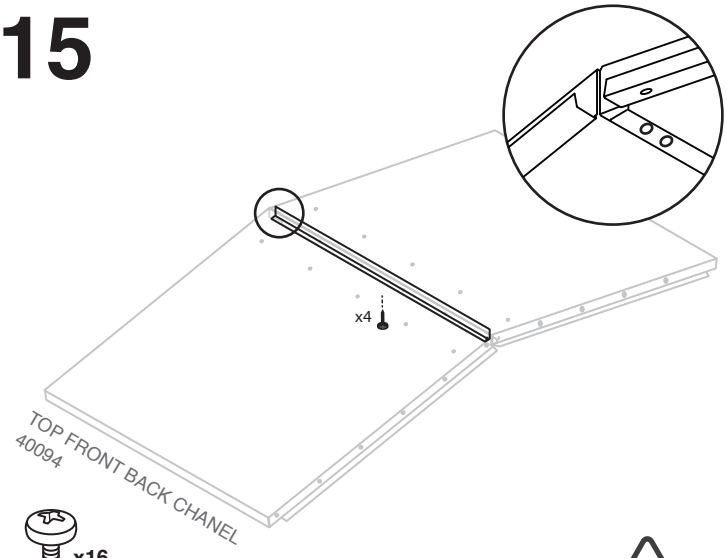

16

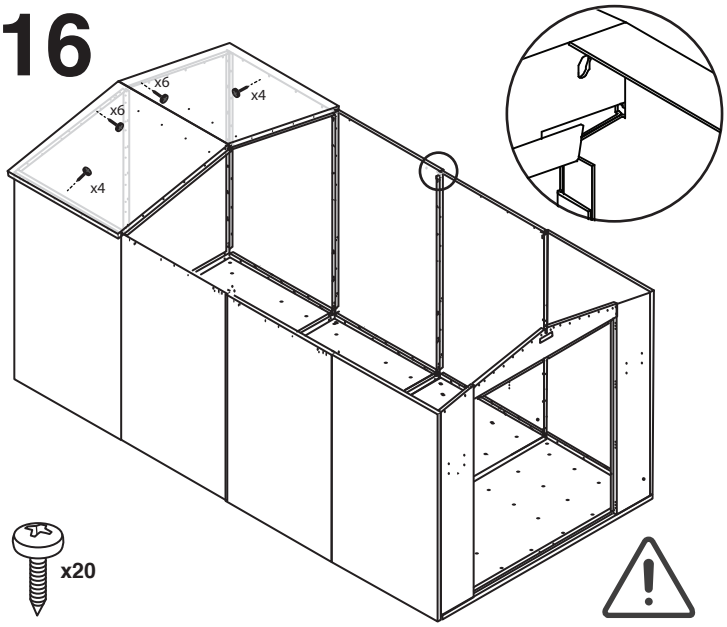

17

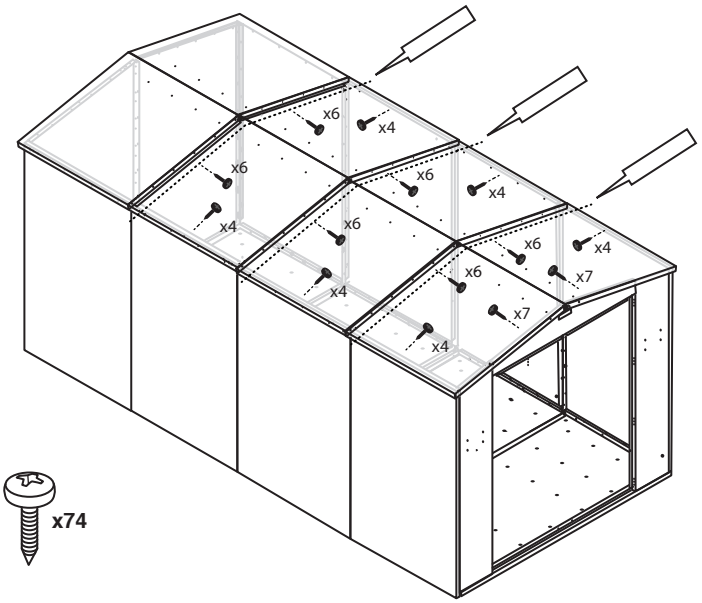

18

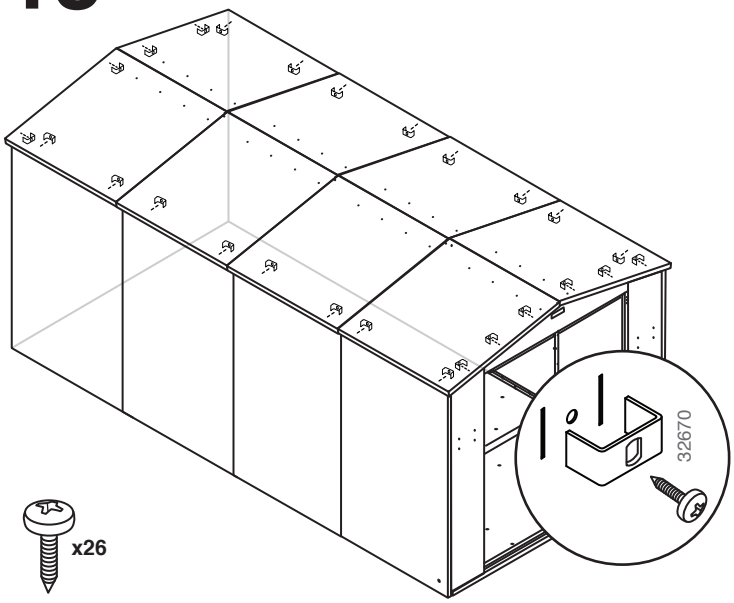

PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

19

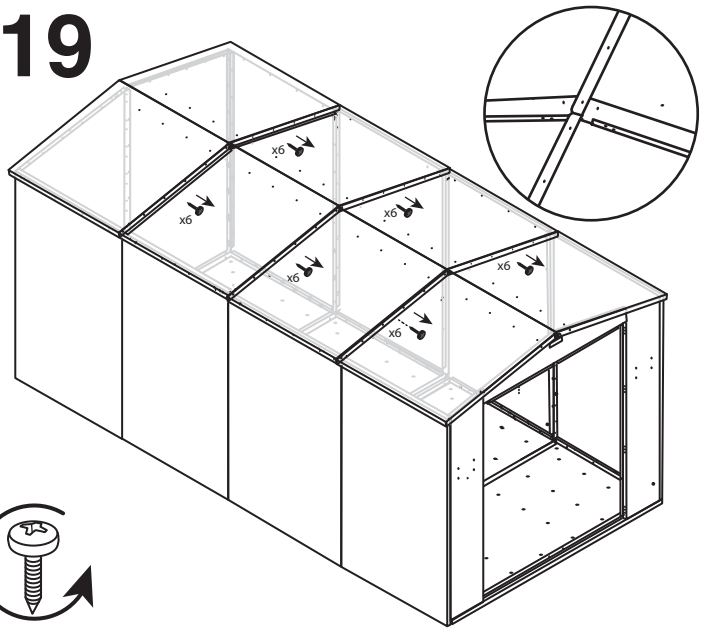



20

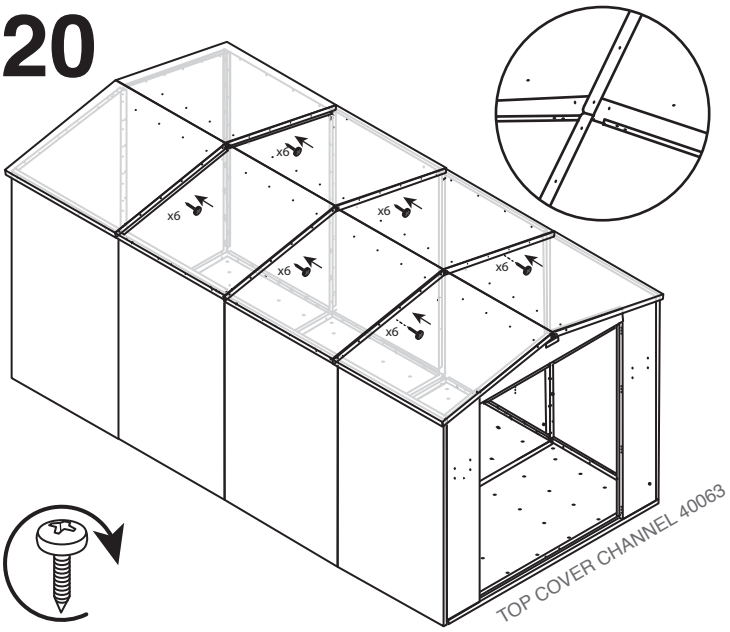

21

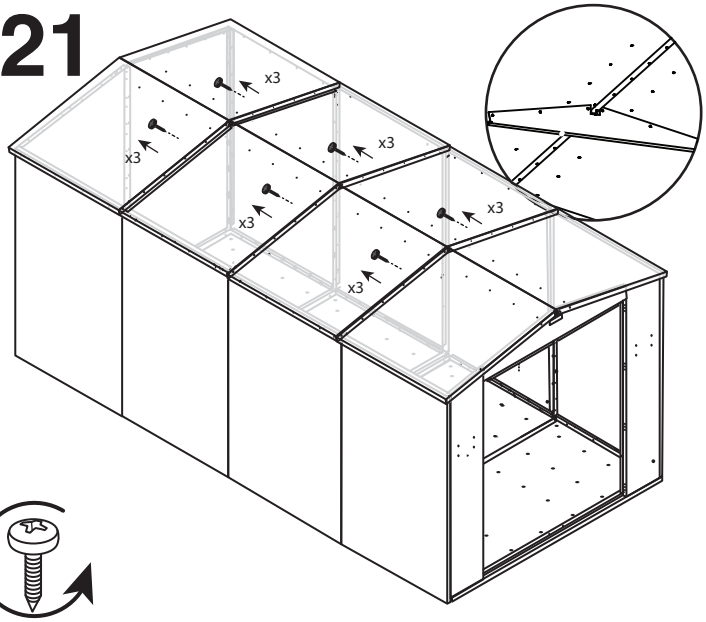



22

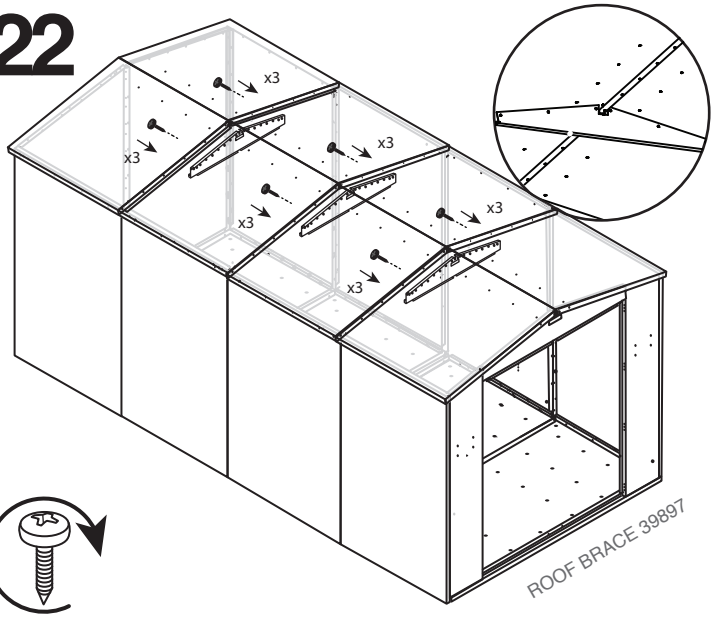



23

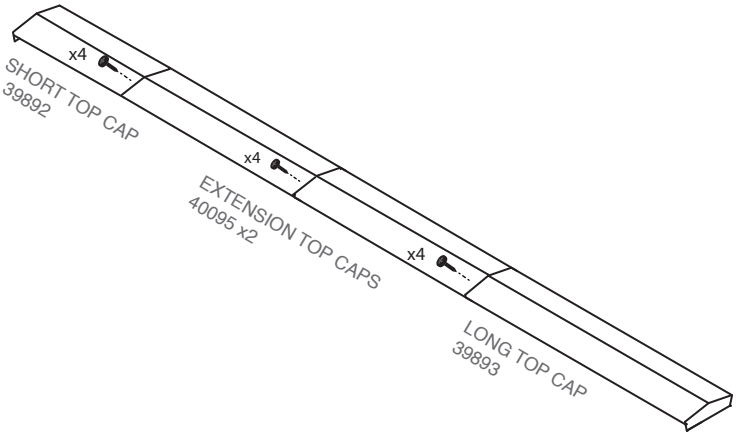

x12

24!

NO SCREWS REQUIRED
TOP END OF STRIP TRAPPED
UNDER TOP CAP



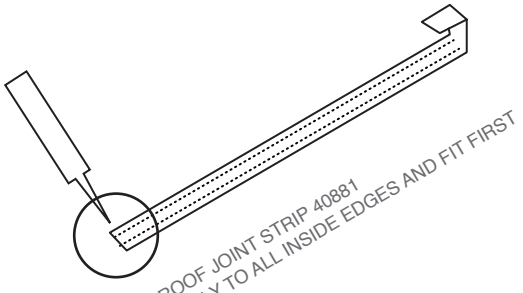

25

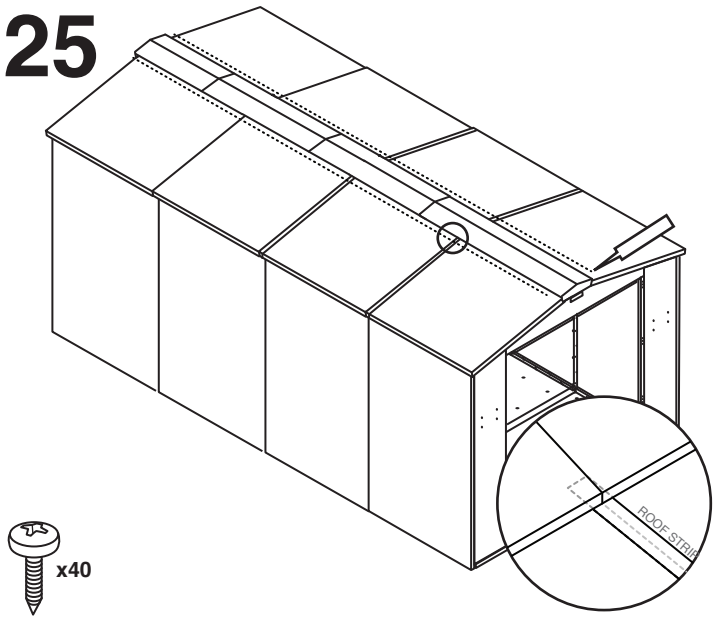

x40

26

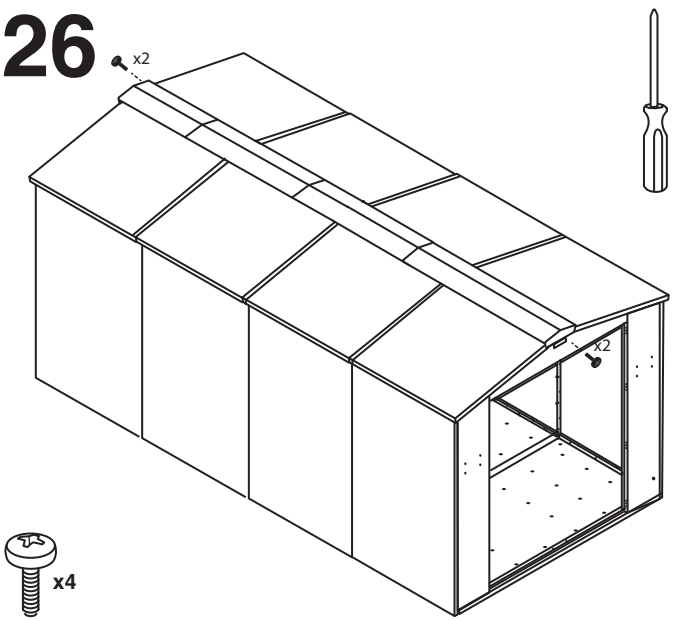

x4

27

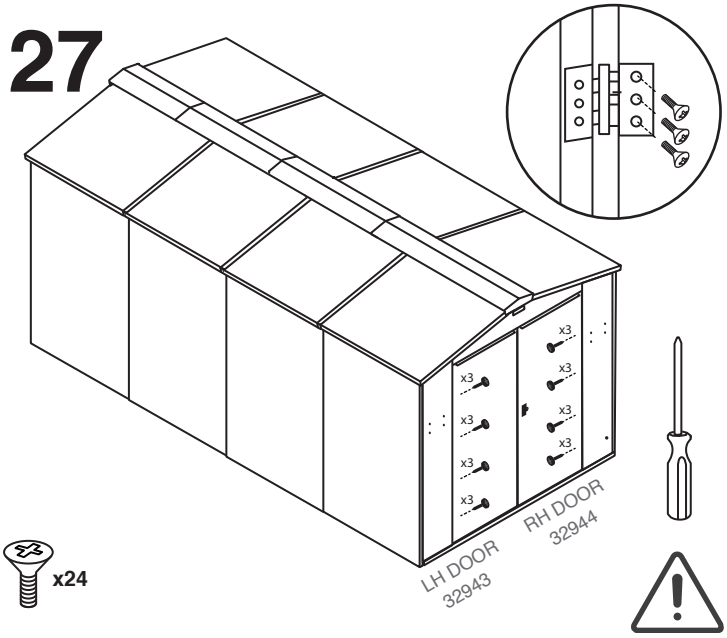

x24

28! LEVEL SHED UNTIL DOORS ALIGN USING ZCOMPPLAS AS SUITABLE

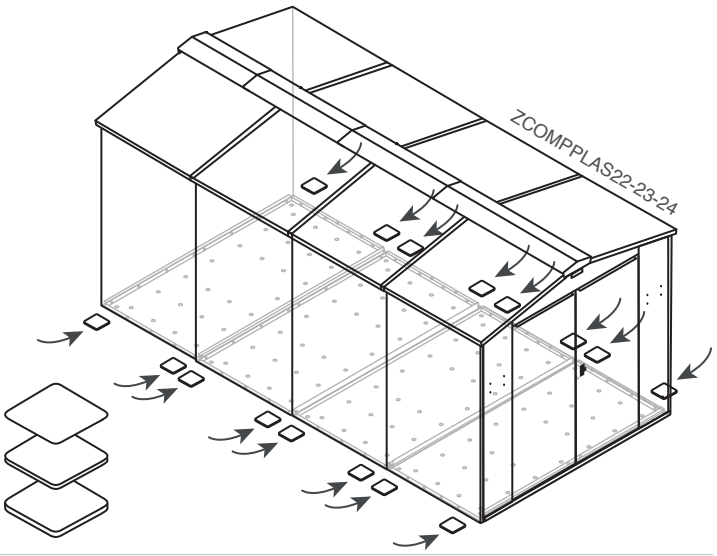

29

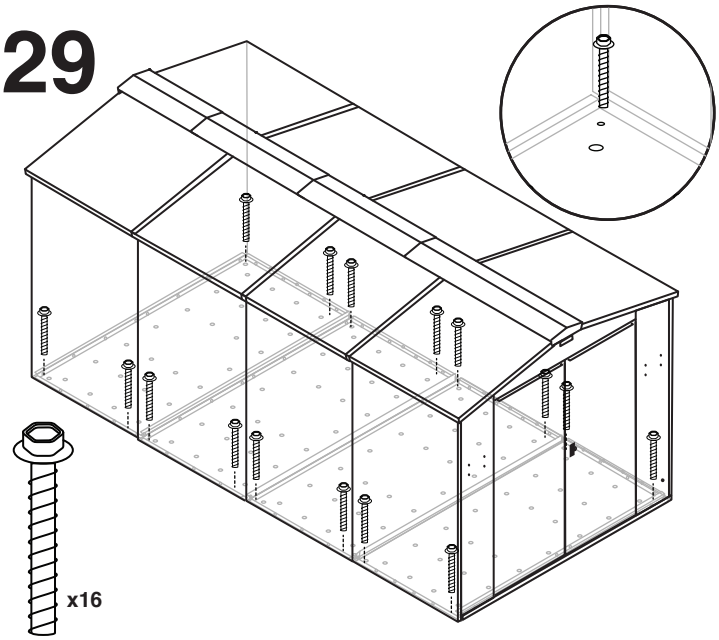

x16