



Asgard
storage for life

Flat and firm base. Recommended: concrete, tarmac or paving flags.
Min. distance from walls/ shrubbery: 1000mm.
Min. base size (WxDxH) 2410mm x 3100mm x 50mm.


Correctly level the constructed unit using the shims (ZCOMPPLAS) provided prior to fixing the unit to the ground. Slide the packing pieces under the corners of the unit base as required until an equal gap has been achieved around the door allowing for its smooth operation and alignment.

Power driver POSI-DRIV screwdriver, 6mm dia. masonry drill and a 10mm socket or spanner.




PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE


1

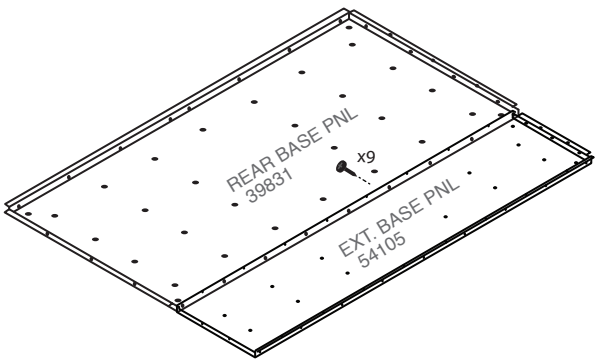


2! IF YOU HAVE AN OPTIONAL RAMP,
PLACE UNDERNEATH FRONT
BASE PANEL AT THIS STAGE

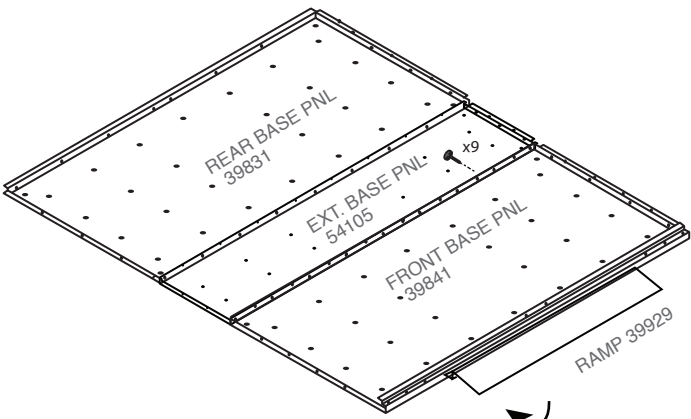


3

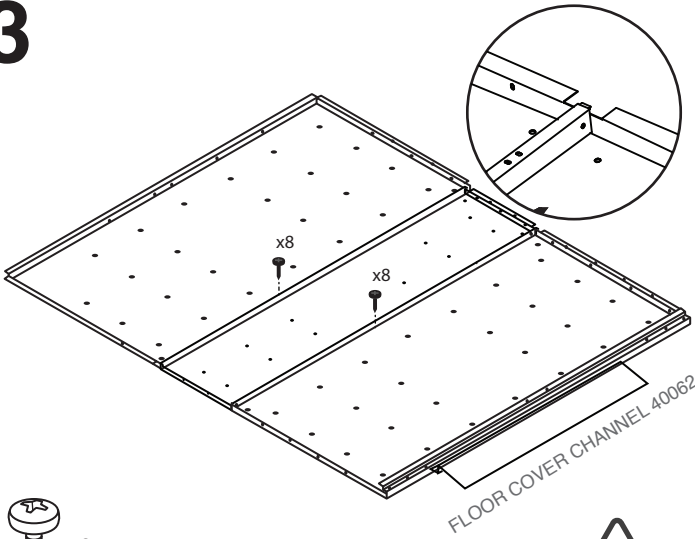


4

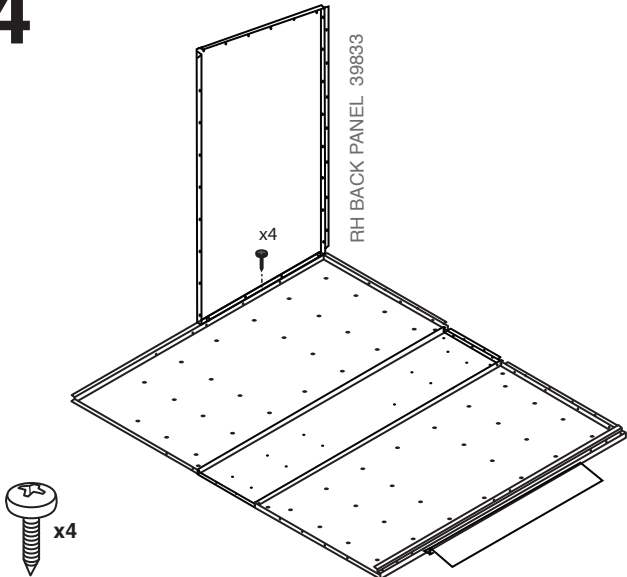

5

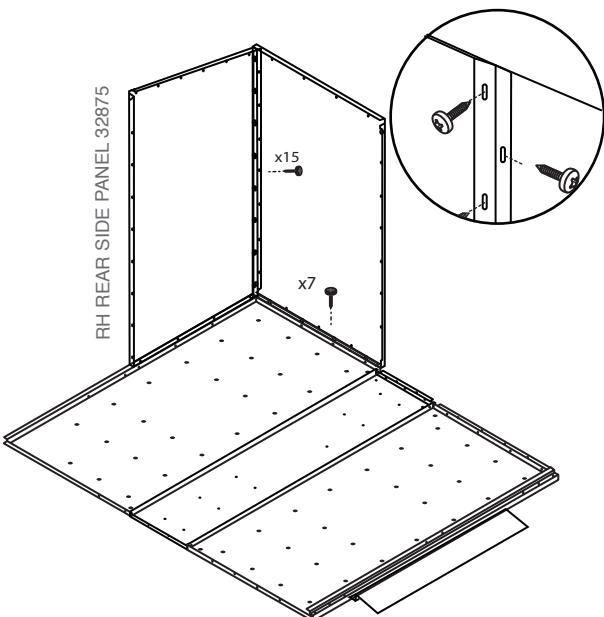


6

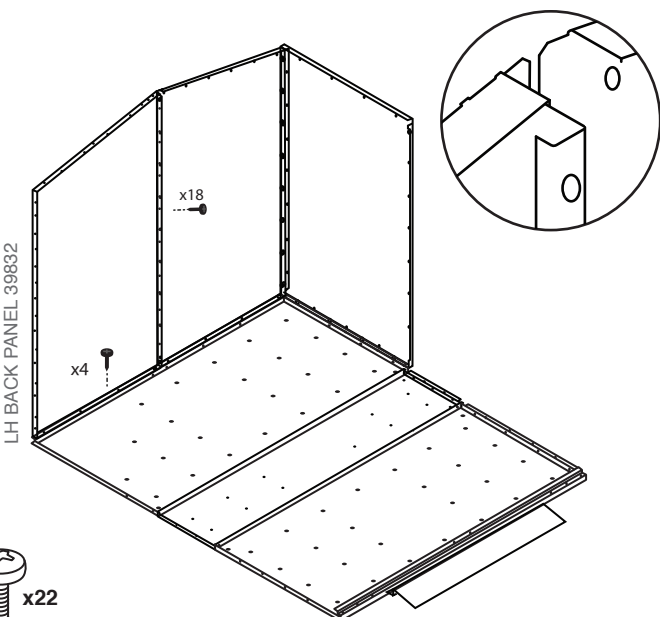


PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE


7

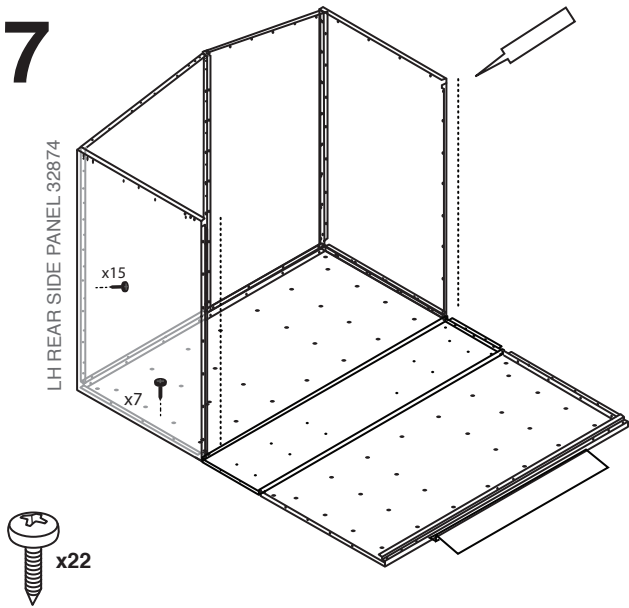


8

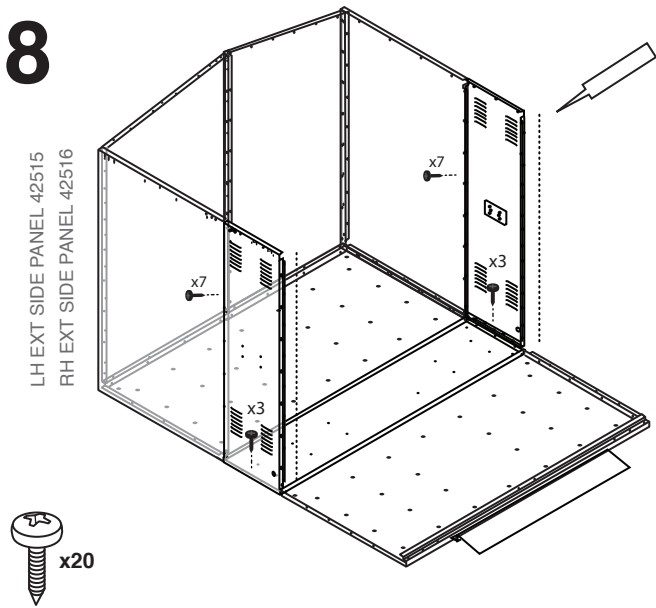


9

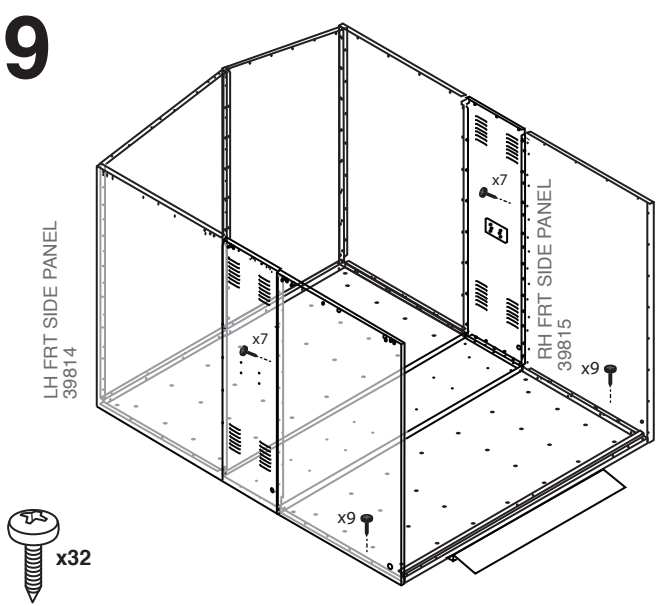


10

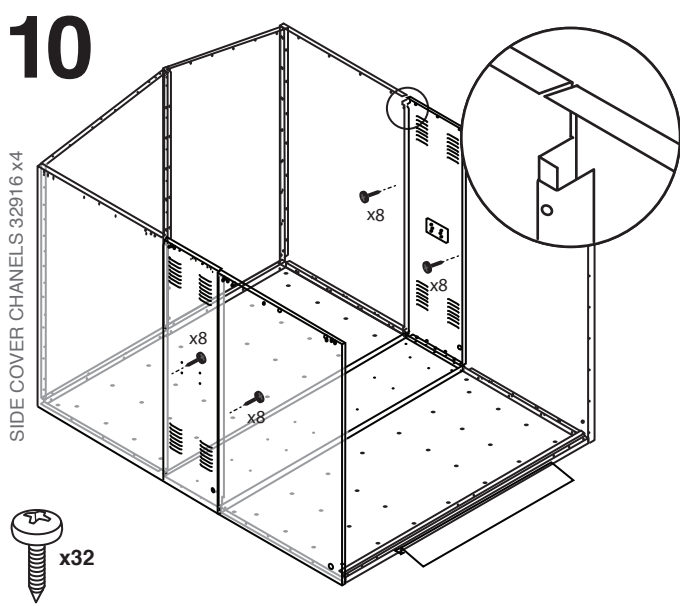

11

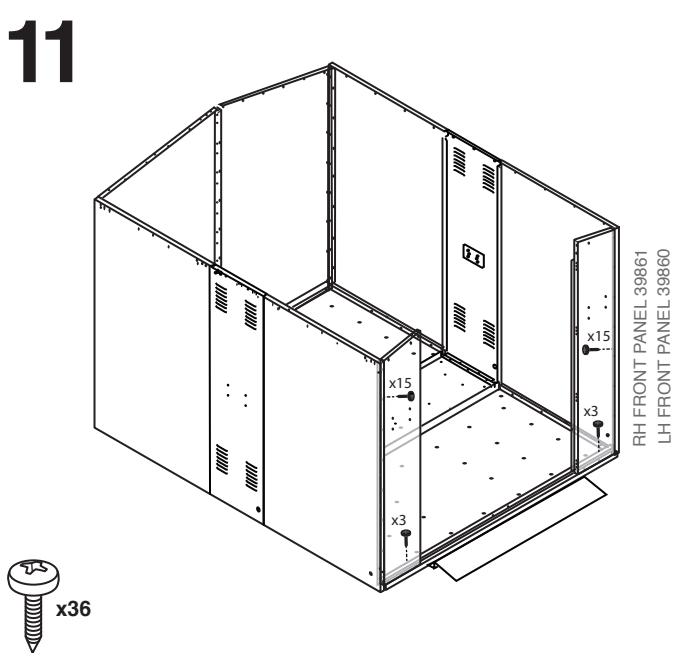


12

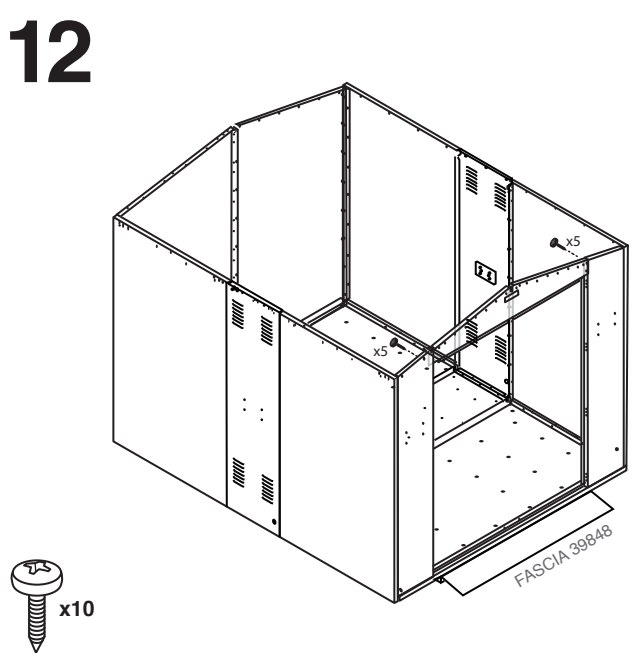


PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE


13

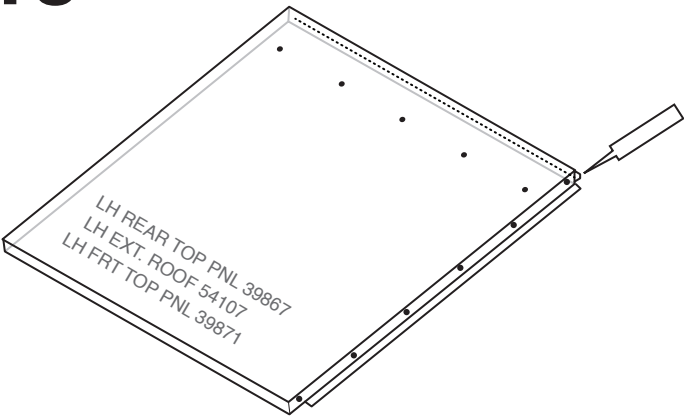


14

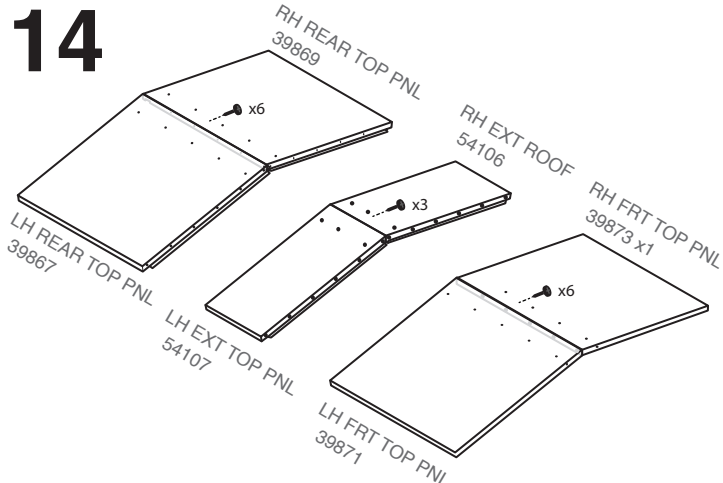


15

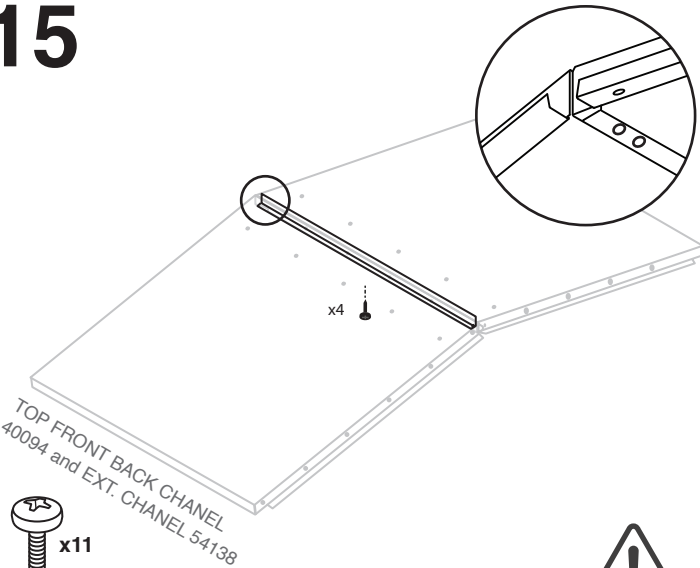



16

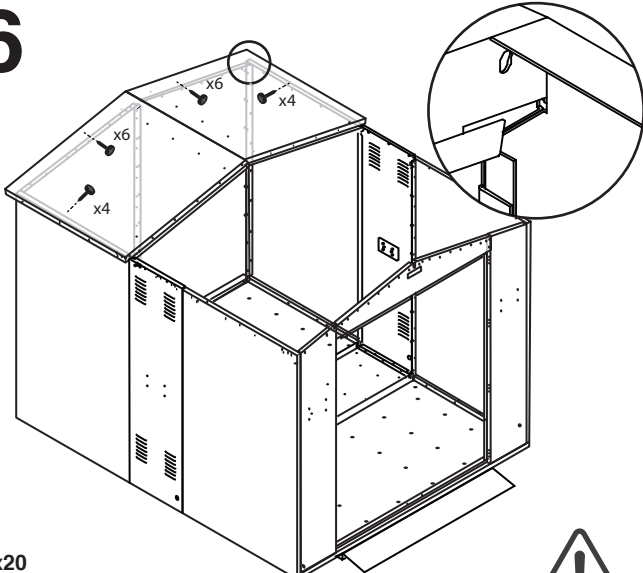

17

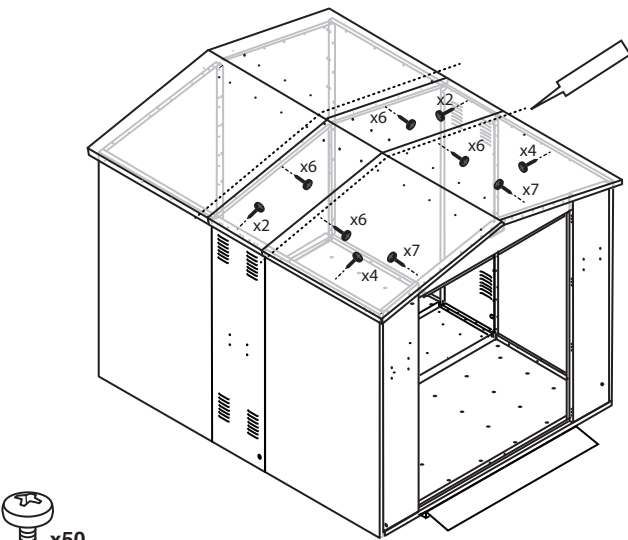


18

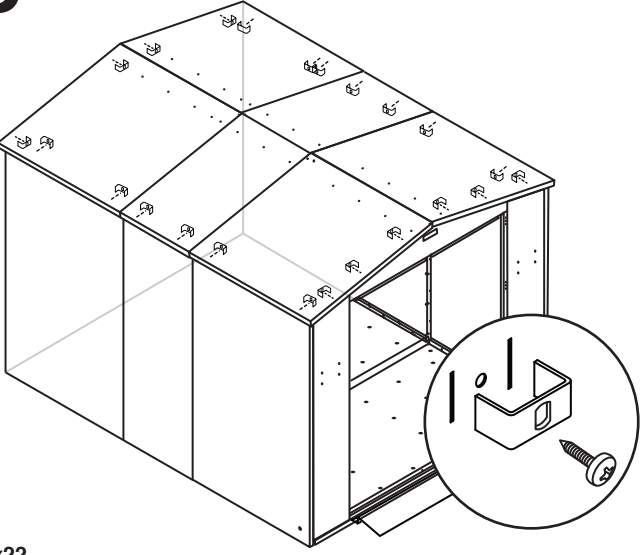


PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE


19

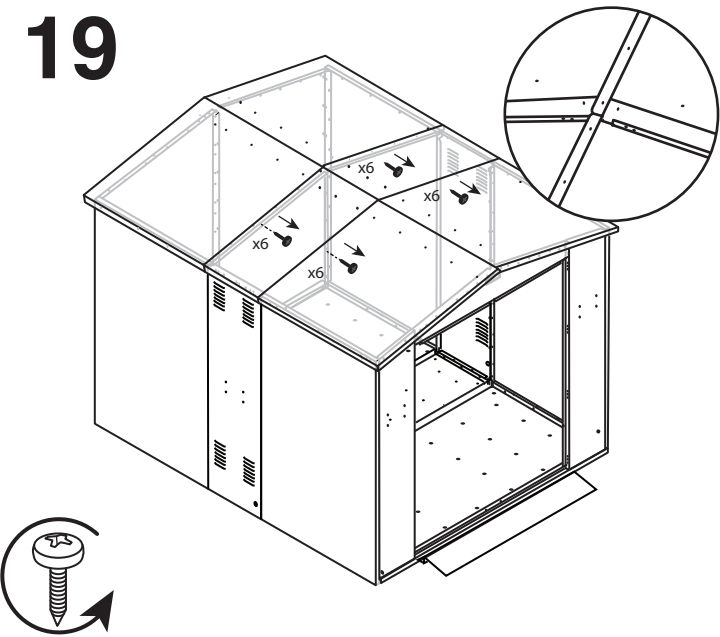


20

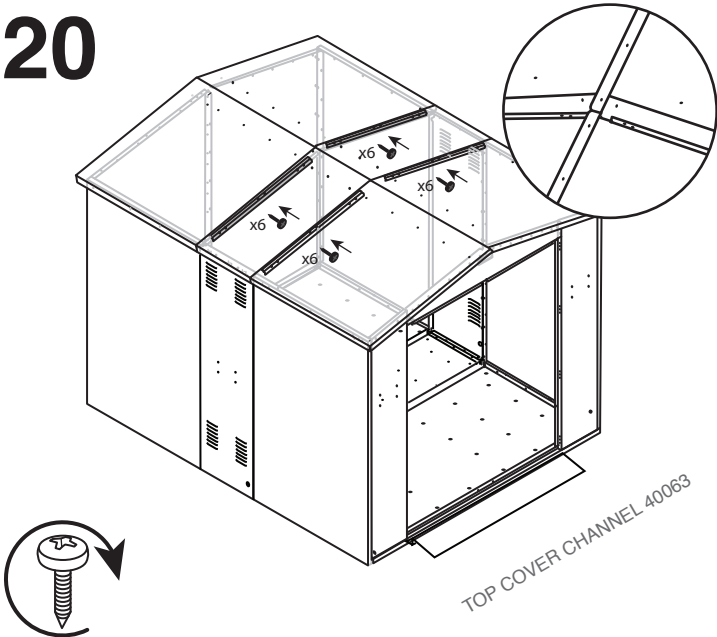


21

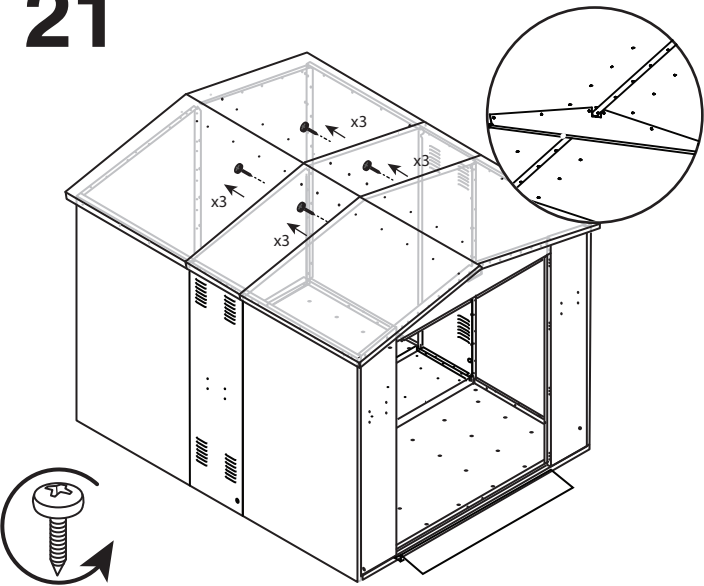


22

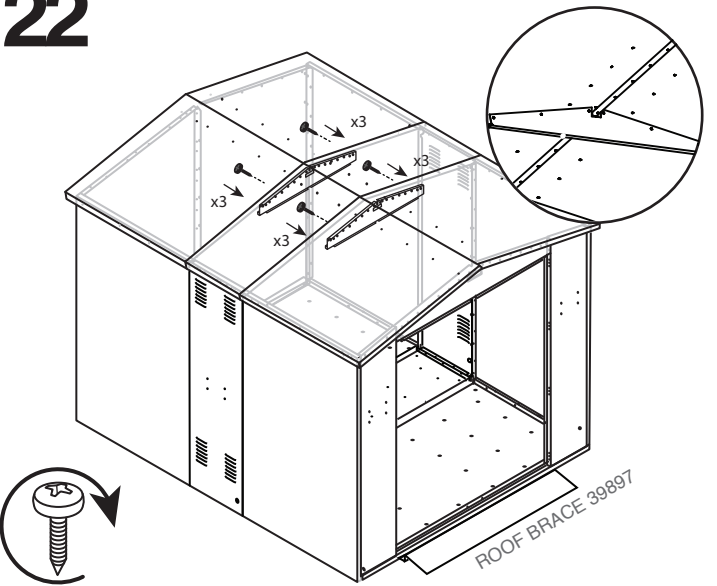

23

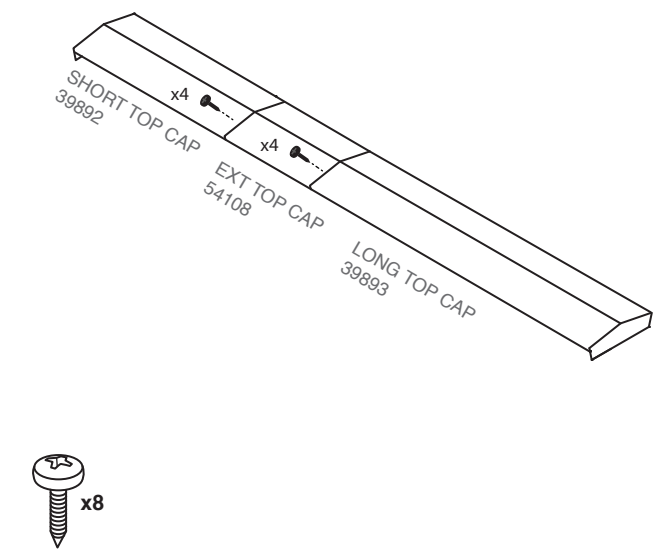


24! NO SCREWS REQUIRED
TOP END OF STRIP TRAPPED
UNDER TOP CAP

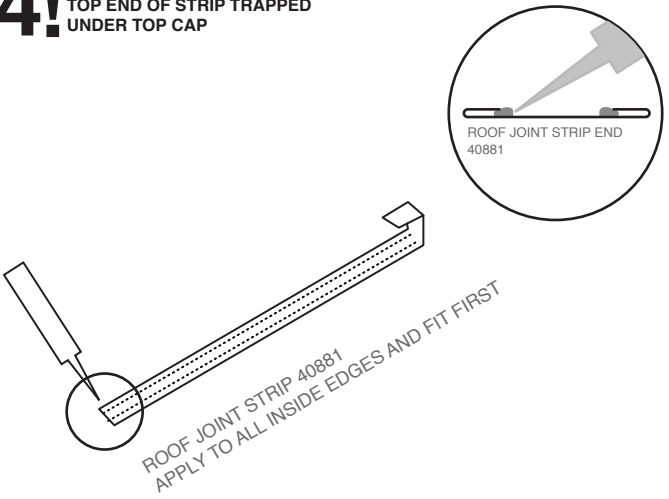


PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

25


SHORT TOP CAP 39892
EXT TOP CAP 54108
LONG TOP CAP 39893

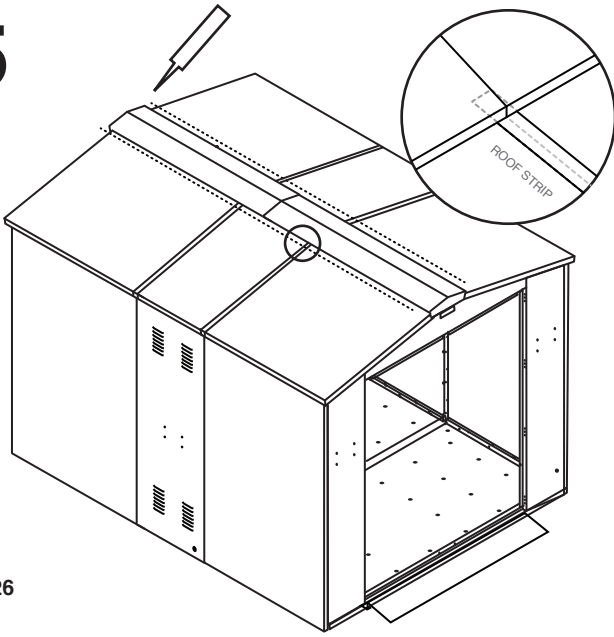


26

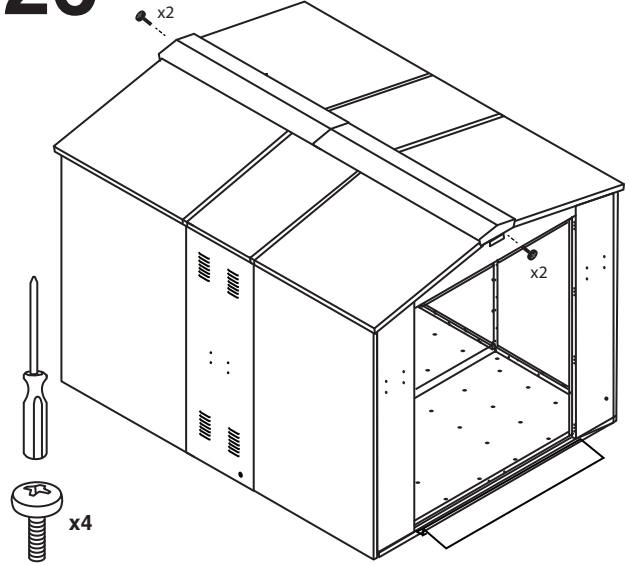


27

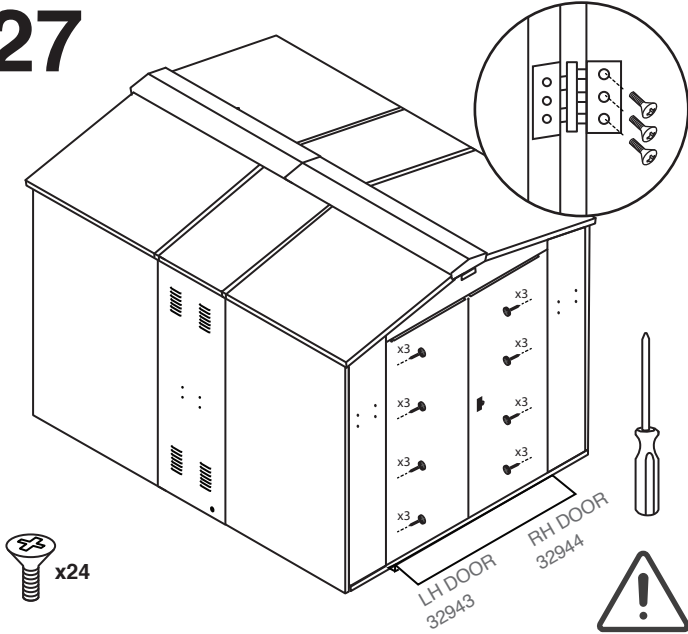

28! LEVEL SHED UNTIL DOORS
ALIGN USING ZCOMPLAS
AS SUITABLE

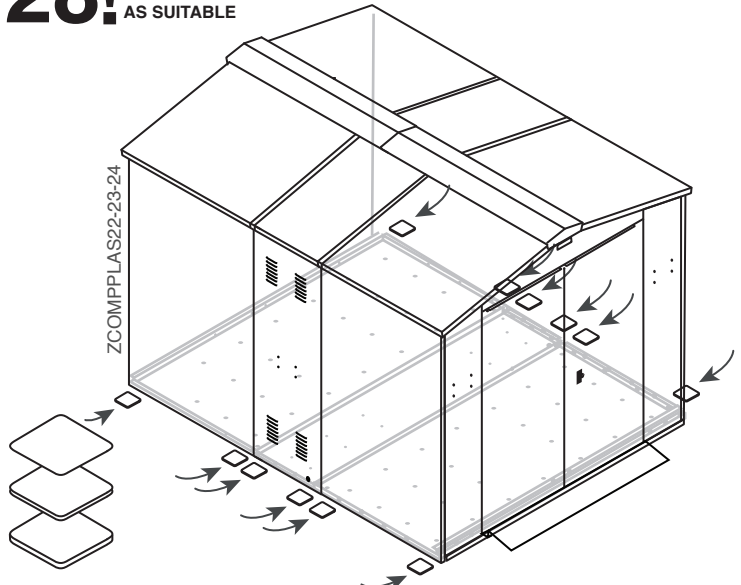

29

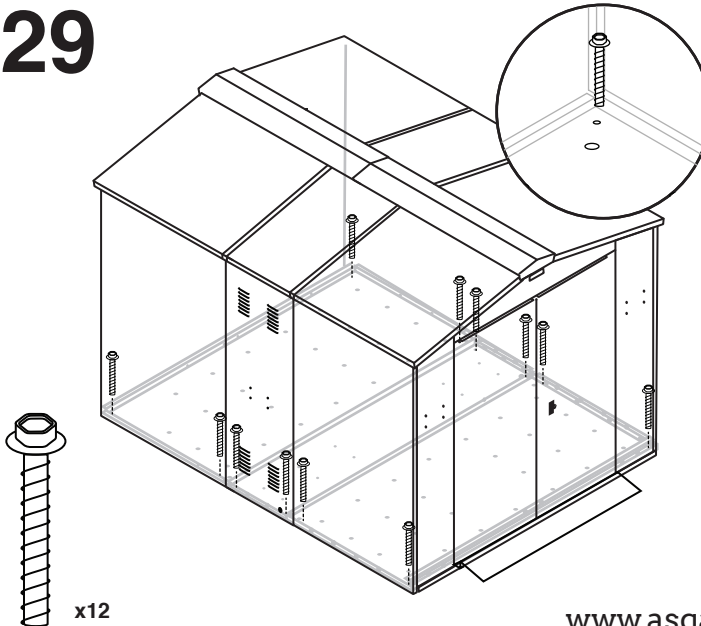

www.asgardsss.co.uk