

MOTORCYCLE UNIT PLUS 1

BASE INSTRUCTIONS

Flat and firm base. Recommended: concrete, tarmac or paving flags.
Min. distance from walls/ shrubbery: 1000mm.
Min. base size (WxDxH) 4824mm x 1730mm x 50mm.

LEVELING THE UNIT

Correctly level the constructed unit using the shims (ZCOMPPLAS) provided prior to fixing the unit to the ground. Slide the packing pieces under the corners of the unit base as required until an equal gap has been achieved around the door allowing for its smooth operation and alignment.


It is always recommended to anchor the unit to the ground. Drill through the four holes in each of the base of the unit using 6mm dia masonry drill to a depth of 70mm. Screw in the anchor fixings. (These have a self cutting thread). If not anchoring the unit, fit the self seal plugs BEFORE BUILDING to seal the fixing holes from underneath. **Please note product must be bolted down to comply with LPS1175.**

TOOLS REQUIRED

Power driver POSI-DRIV screwdriver, 6mm dia. masonry drill and a 10mm socket or spanner.









Warning: some panels may weigh over 20Kg
Beware of manual handling

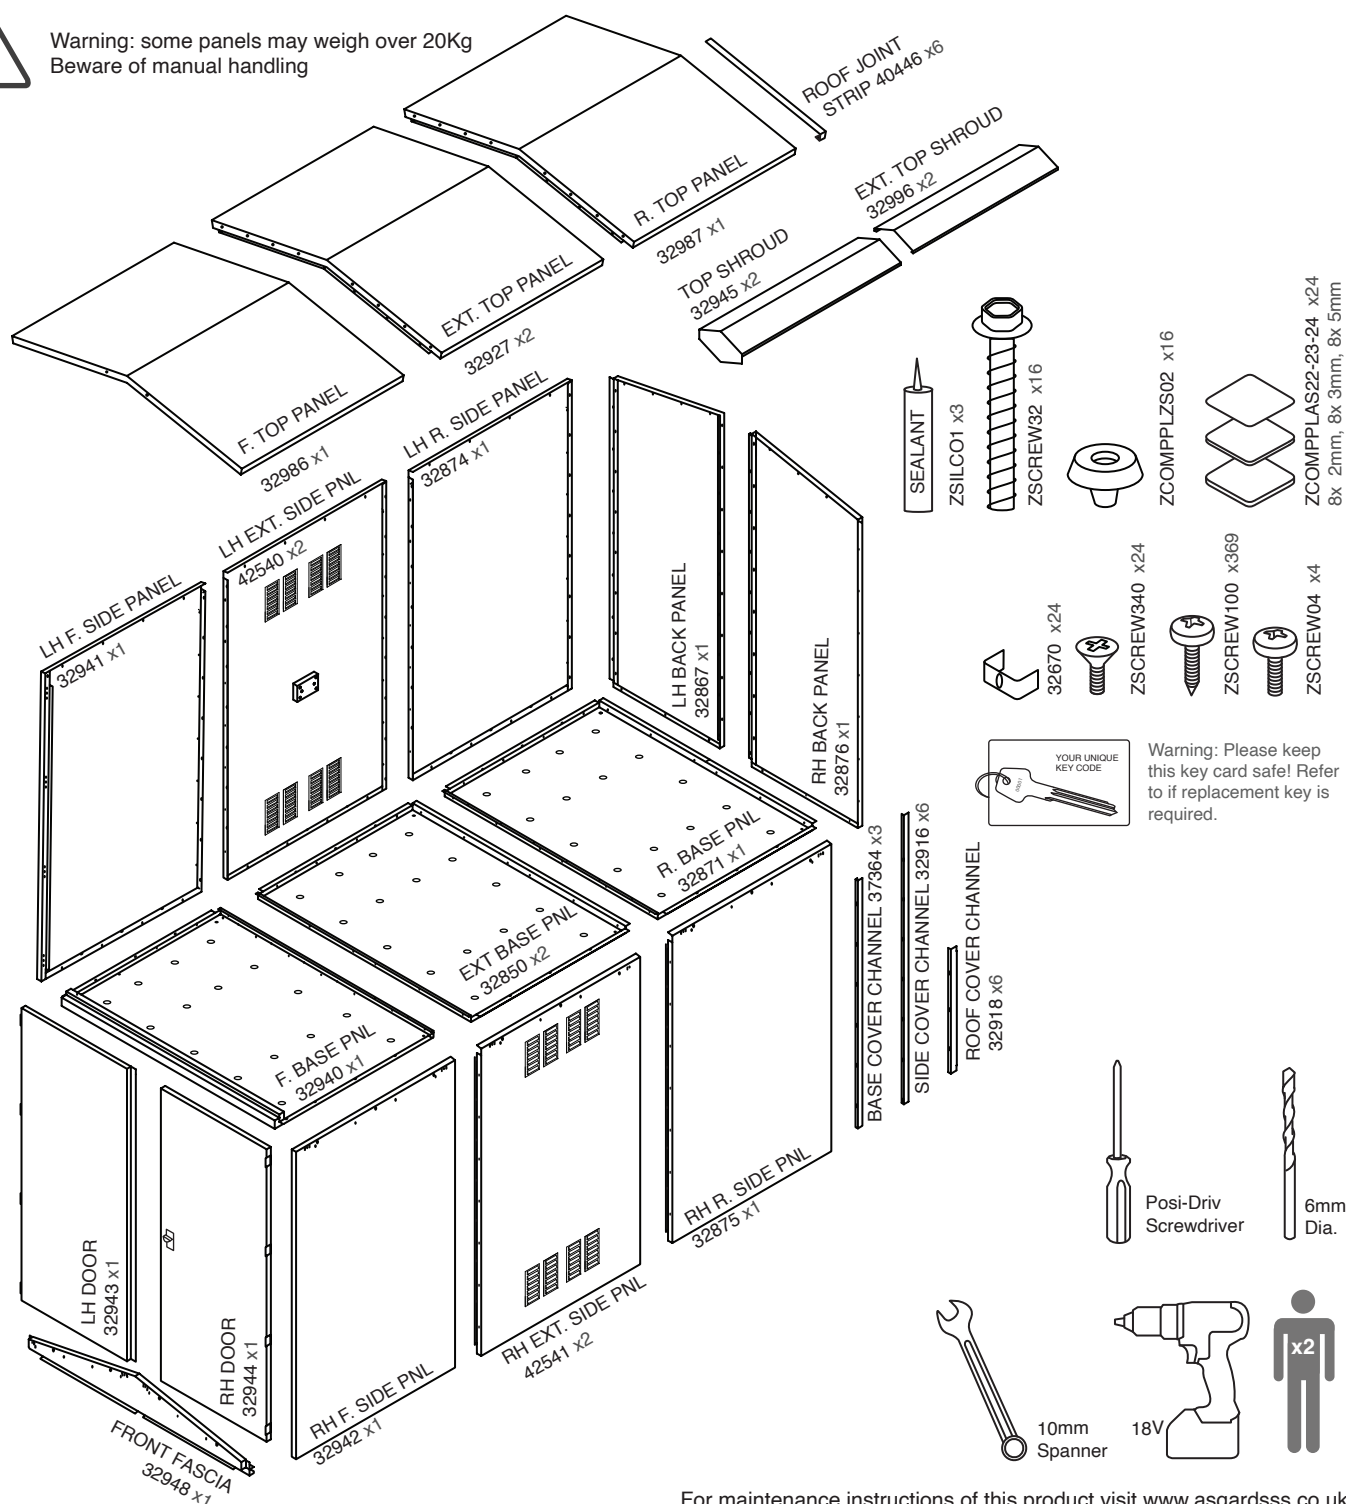


Warning: Please keep this key card safe! Refer to if replacement key is required.

PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

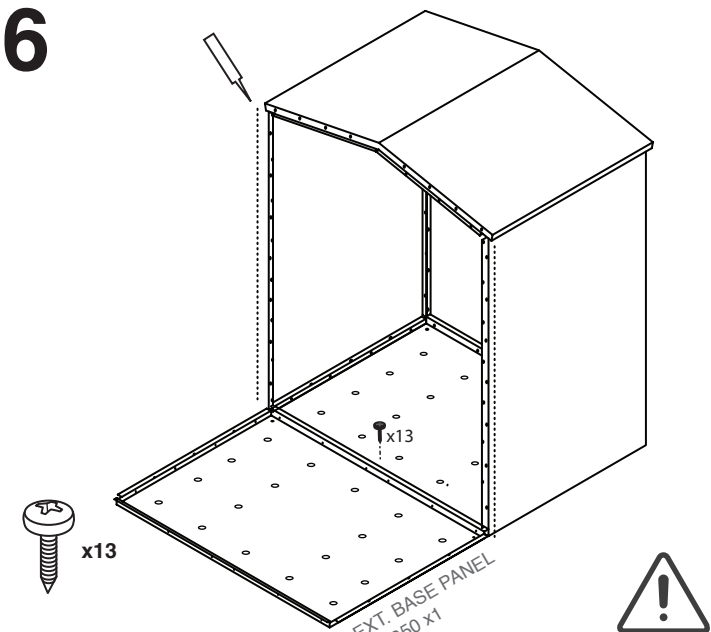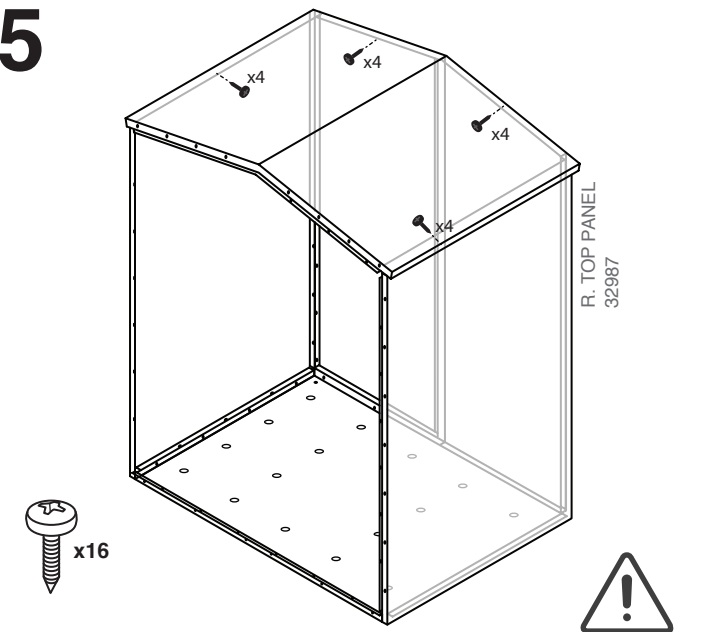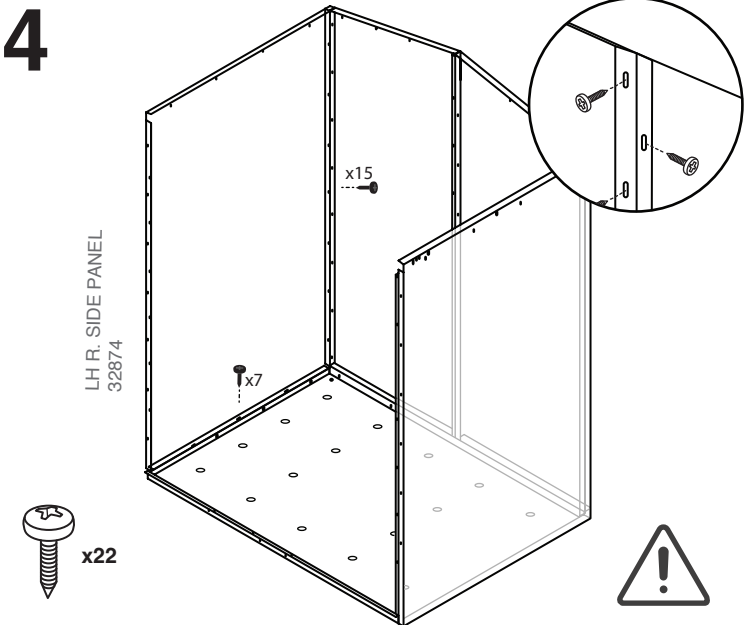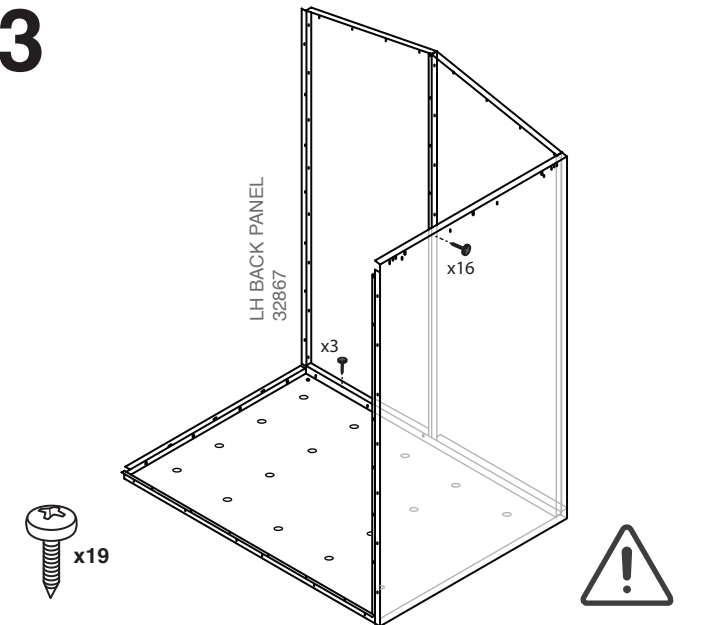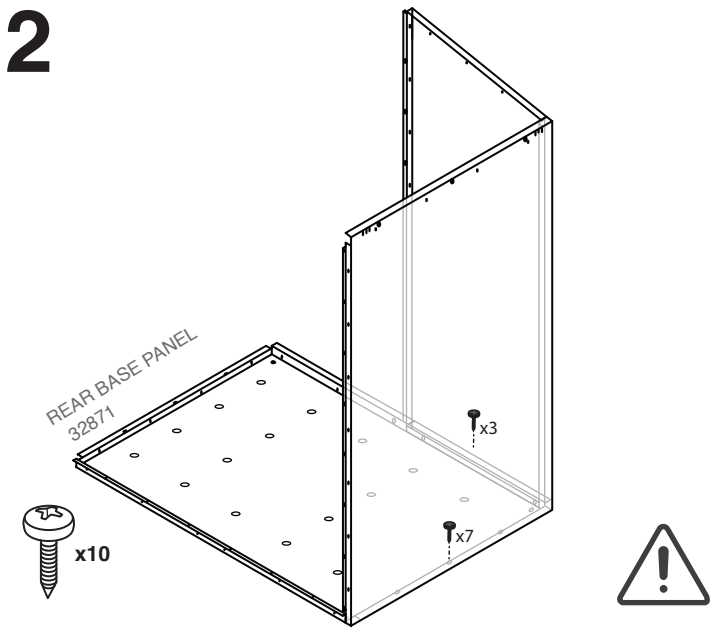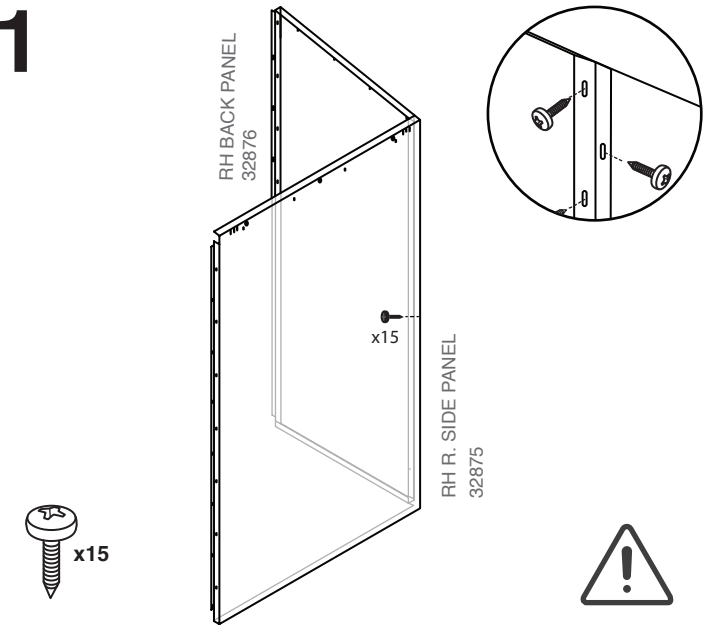


7

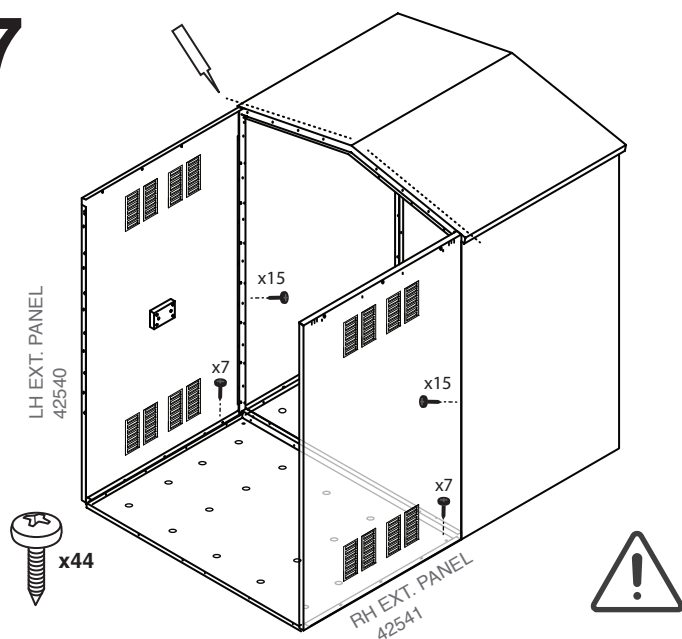


8

REPEAT 6-8 TWICE

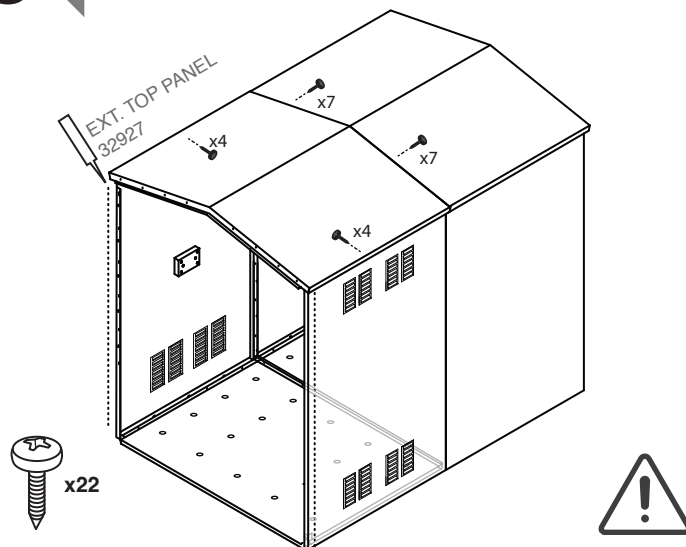


9!


IF YOU HAVE AN OPTIONAL RAMP,
PLACE UNDERNEATH FRONT
BASE PANEL AT THIS STAGE

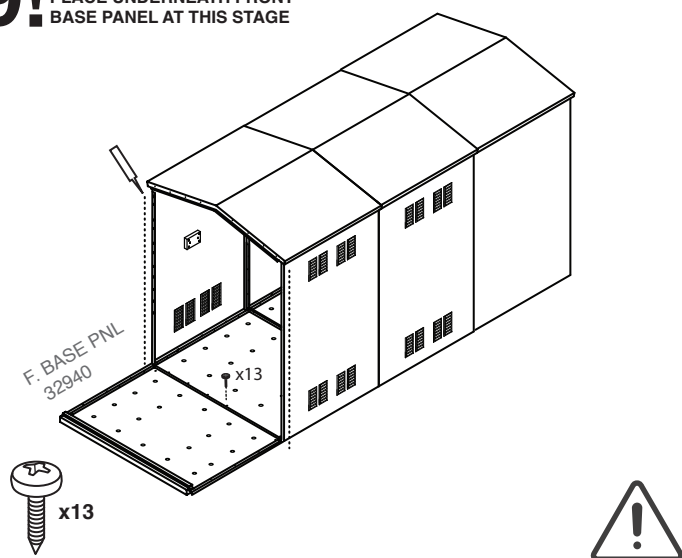


10

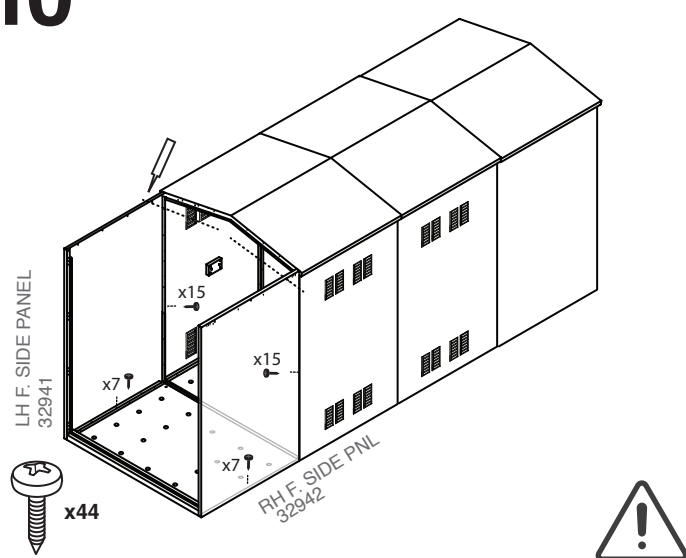

11

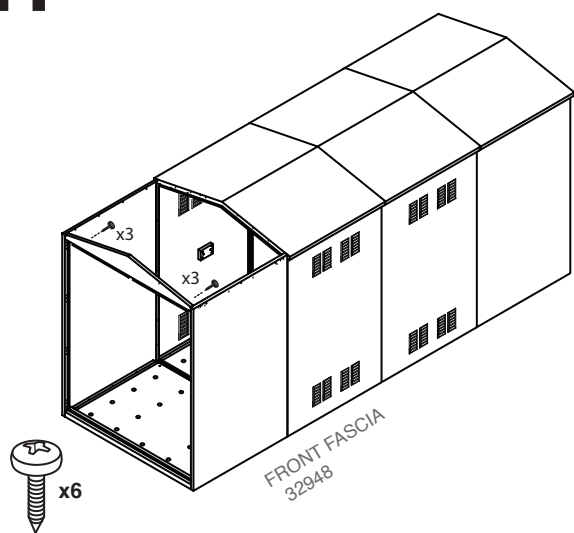

12

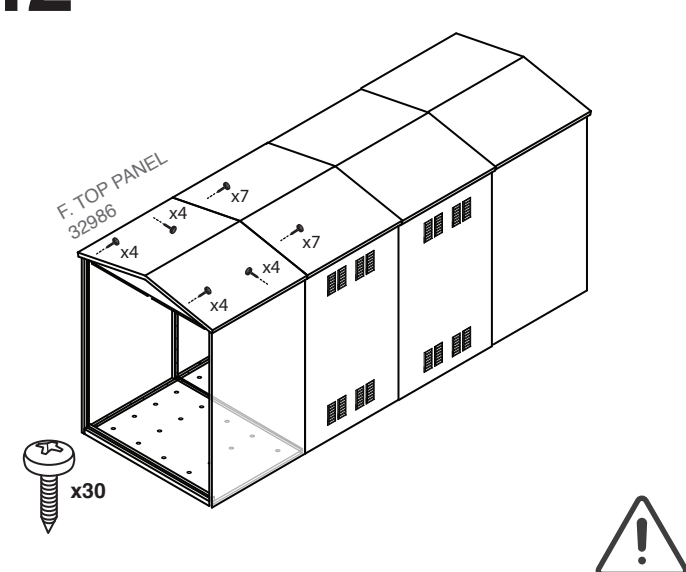

13

LH DOOR
32943

x3
x3
x3
x3
x3
x3

RH DOOR
32944

x3
x3
x3
x3
x3
x3

x24

Warning symbol: exclamation mark inside a triangle.

14! NO SCREWS REQUIRED
TOP END OF STRIP TRAPPED UNDER TOP CAP

ROOF JOINT STRIP END 40446

TOP SHROUD 32945 x2

EXT. TOP SHROUD 32996 x2

ROOF JOINT STRIP 40446
APPLY TO ALL INSIDE EDGES
AND FIT FIRST

15

SHROUDS 32996 & 32945
ROOF JOINT STRIP 40446


x2

x4

ROOF STRIP

17 ! REMOVE SCREWS WHICH ALIGN WITH THE COVER CHANNELS.
ALIGN AND PLACE SCREWS BACK

SIDE COVER CHANNEL 32916
ROOF COVER CHANNEL 32918
BASE COVER CHANNEL 37364

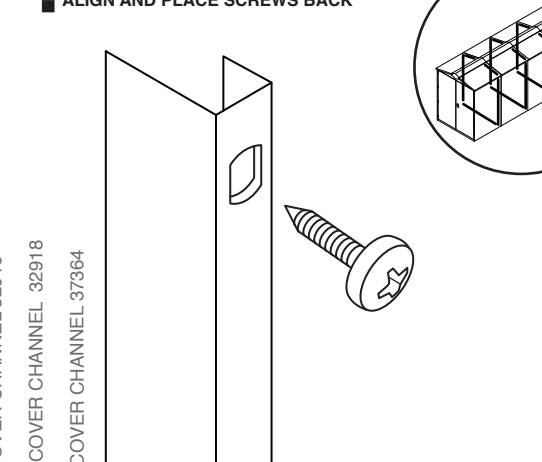

The diagram illustrates the removal of screws from the cover channels. A large screw is shown being removed from the side cover channel. An inset shows the roof and base cover channels, which are also being removed. The text indicates that the screws should be aligned and placed back.

18!

LEVEL SHED UNTIL DOORS
ALIGN USING ZCOMPPLAS
AS SUITABLE

ZCOMPPLAS22-23-24

19

